

OCXO - 38.1 X 38.1 X 25.4mm SQUARE PACKAGE
FEATURES:



- TIGHT STABILITY AVAILABLE
- LONG TERM AGING
- SC CUT or AT CUT BASED ON APPLICATION

RoHS
Compliant



MODEL		OX - C
FREQUENCY		500 KHz to 60 MHz
FREQUENCY STABILITY		Up to ± 0.01 ppm
OPERATING TEMPERATURE		-40 to 85 °C max. *
STORAGE TEMPERATURE		-40 to 85°C
CRYSTAL		SC cut
SUPPLY	VOLTAGE	12 Volt
	CURRENT	85 mA nominal 550 mA max.
WARM UP TIME		8 minutes @ 25°C
VC		5 Volt nominal
VC INPUT IMPEDANCE		100K Ω typical
AGING		± 0.1 ppm after 30 days of operation (up to 30 MHz)

* Not All Stabilities Available

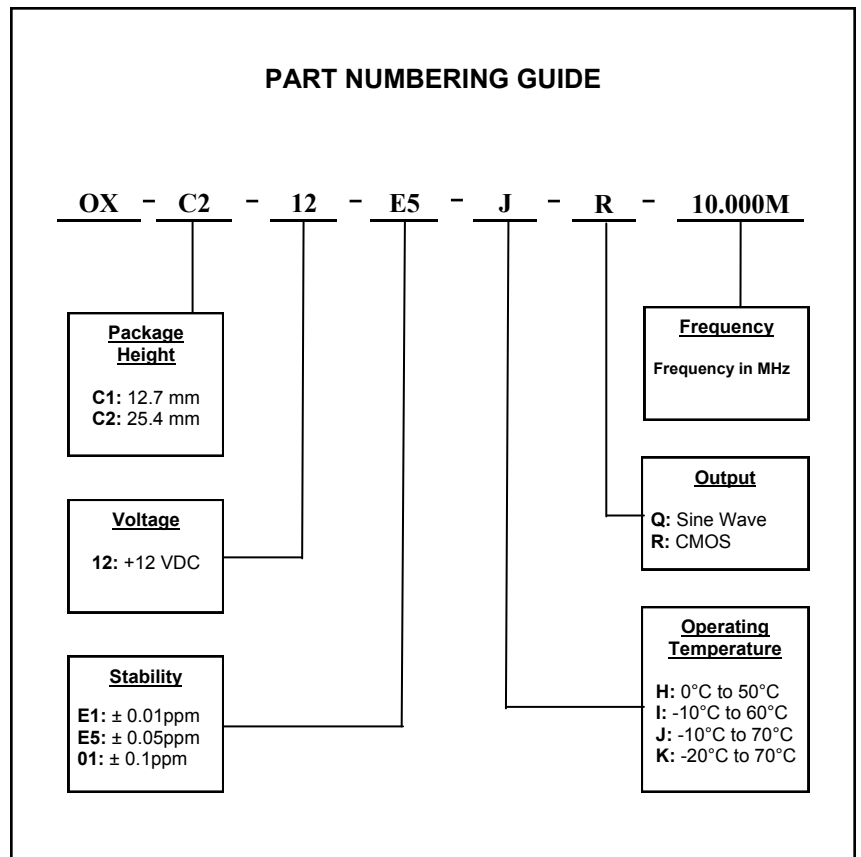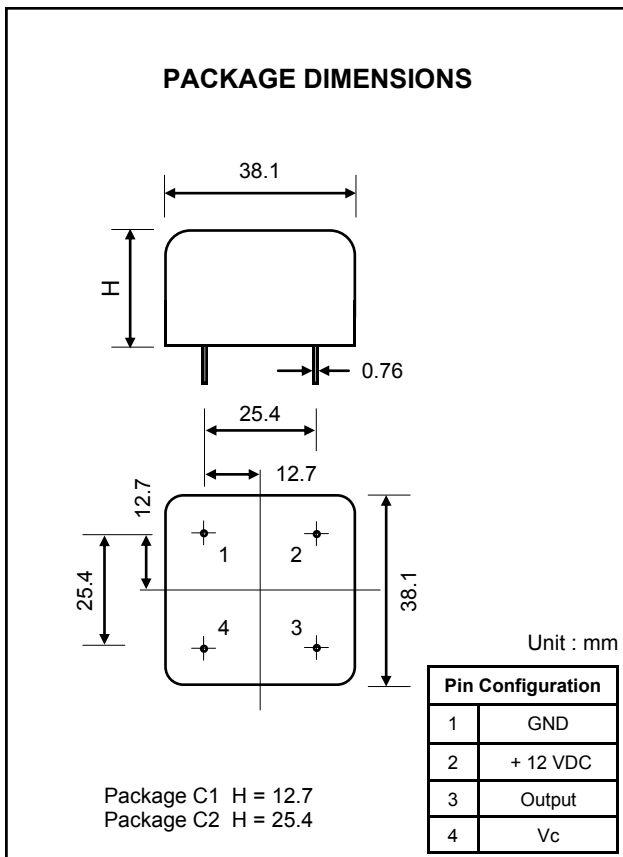

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.