


**OCXO - 35.3 X 27 X 19.1mm "EURO" PACKAGE**
**FEATURES:**



- TIGHT STABILITY AVAILABLE
- LONG TERM AGING
- SC CUT or AT CUT BASED ON APPLICATION

RoHS  
Compliant



MODEL		OX - E
FREQUENCY		1 MHz to 70 MHz
FREQUENCY STABILITY		± 0.1 ppm to ± 0.005 ppm
OPERATING TEMPERATURE		- 40 to 85 °C max. *
STORAGE TEMPERATURE		-40 to 85°C
CRYSTAL		SC cut
SUPPLY	VOLTAGE	12 Volt
	CURRENT	150 mA nominal 650 mA max.
WARM UP TIME		4 minutes @ 25°C
VC		2.5 Volt nominal
VC INPUT IMPEDANCE		100K Ω typical
AGING/ YEAR		± 0.1 ppm after 30 days of operation

\* Not All Stabilities Available

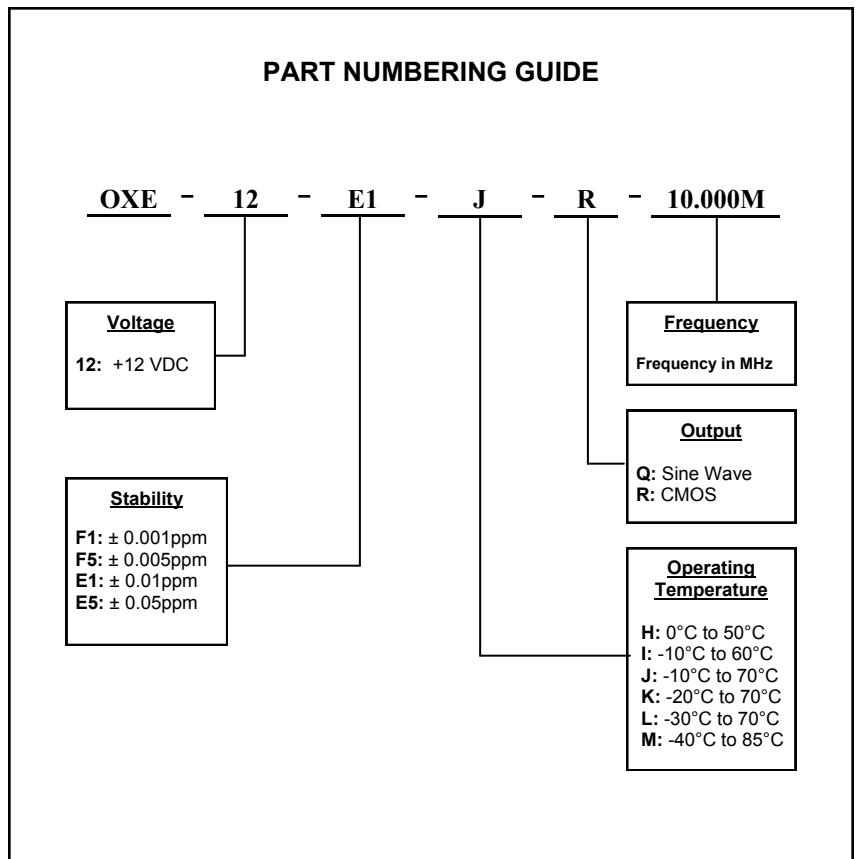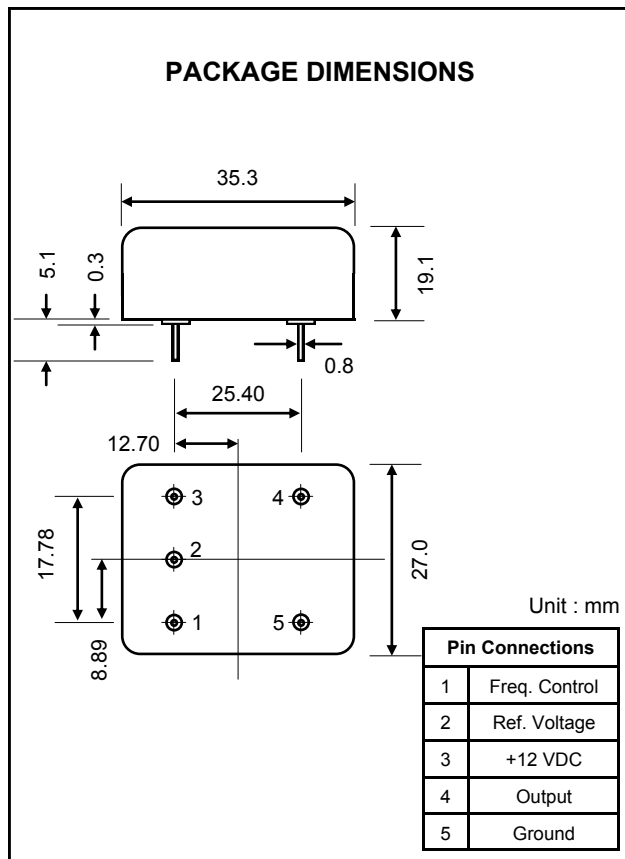

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.