

OCXO - 20.7 X 13.08 X 10.8mm 14PIN DIP FULL SIZE
FEATURES:



- WIDE FREQUENCY RANGE
- LONG TERM AGING
- AT CUT FOR LOW COST

RoHS
Compliant



MODEL		OX - F
FREQUENCY		1 MHz to 70 MHz
FREQUENCY STABILITY		± 0.5 ppm to ± 0.05 ppm
OPERATING TEMPERATURE		-40 to 85 °C max. *
STORAGE TEMPERATURE		-40 to 95°C
SUPPLY	VOLTAGE	3.3 Volt or 5 Volt
	CURRENT	0.6W nominal 1.6W max.
WARM UP TIME		3 minutes @ 25°C
HCMOS OUTPUT LEVEL (15pF)		High Level 90% Vcc Min. Low Level 10% Vcc Max.
VC		2.5 Volt nominal
VC INPUT IMPEDANCE		100K Ω typical
AGING/ YEAR		± 1.0 ppm after 30 days of operation
SSB Phase Noise		10Hz -100dBc; 100Hz -127dBc; 1KHz -140dBc

* Not All Stabilities Available

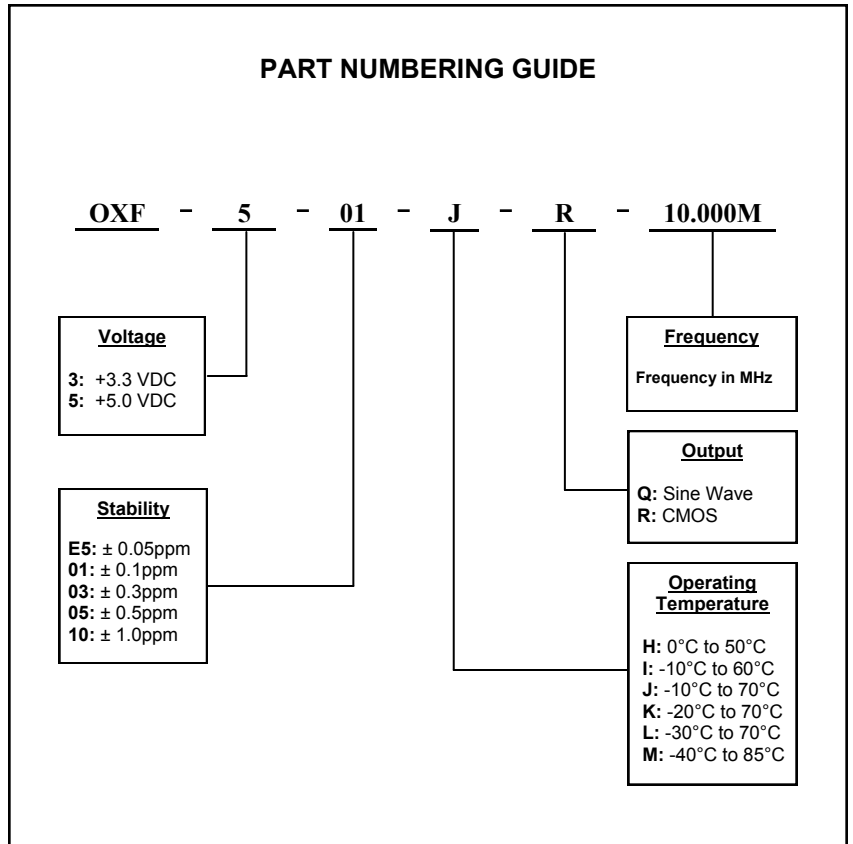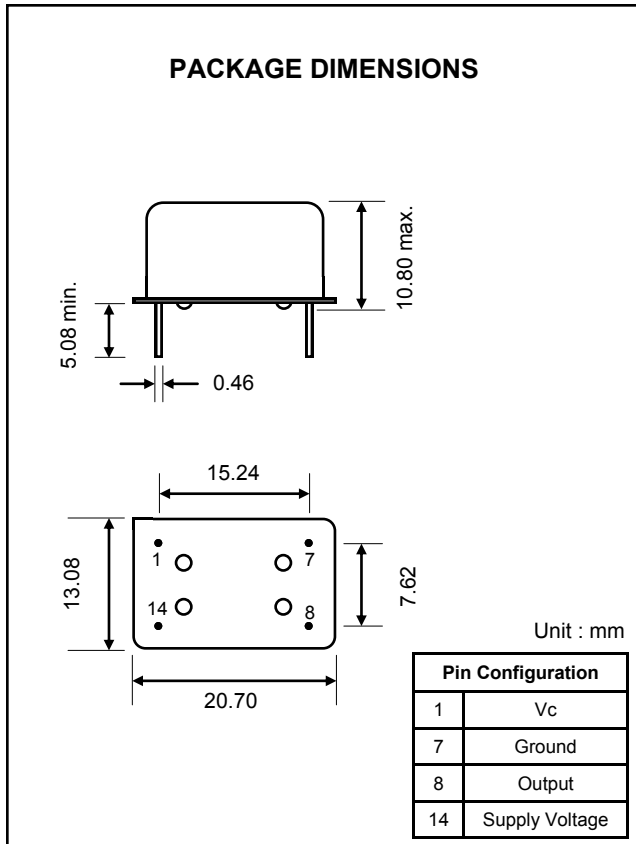

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.