


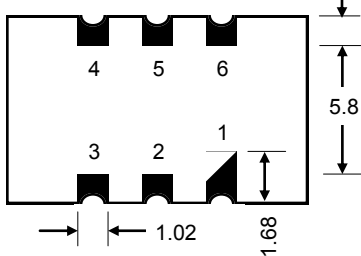
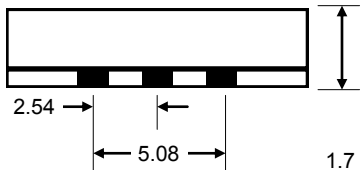
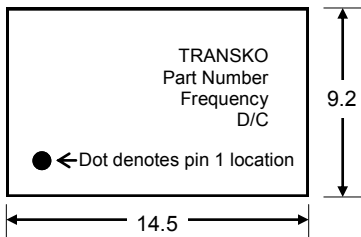
FR-4 SMD LVDS OUTPUT OSCILLATOR (14.5 x 9.2 x 5.5mm)
FEATURES:

- HIGH FREQUENCY
- ULTRA LOW PHASE JITTER PERFORMANCE
- ENABLE / DISABLE

RoHS
Compliant

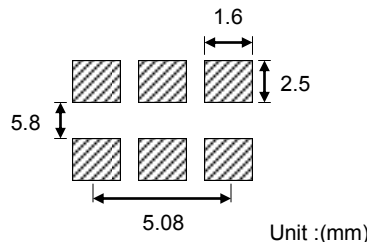
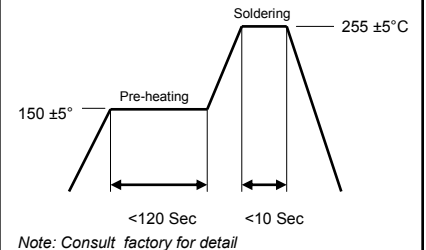
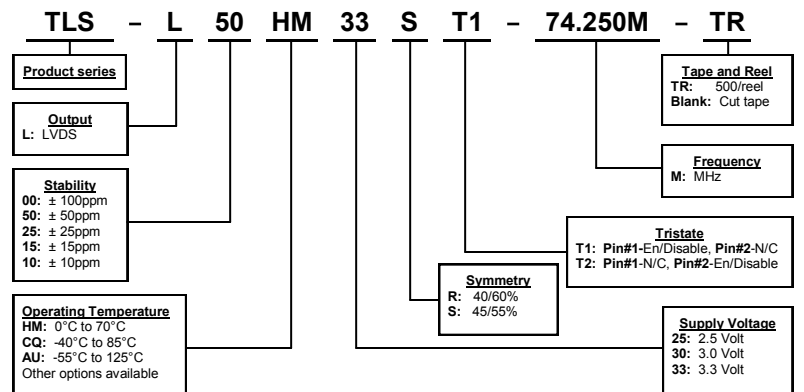


MODEL	TLS	
SUPPLY VOLTAGE	2.5V	3.3V
FREQUENCY RANGE	12.000MHz ~ 312.500MHz	12.000MHz ~ 800.000MHz
FREQUENCY STABILITY*	±15ppm ~ ±100ppm	
OPERATING TEMPERATURE	0°C to 70°C, Option: -40°C to 85°C	
STORAGE TEMPERATURE	-55°C to 125°C	
INPUT CURRENT	75mA max.	
DUTY CYCLE	50% ±5% (50% of waveform)	
RISE TIME / FALL TIME	250pS typical, 600pS max.	
LOGIC "1" LEVEL (VoH)	Vcc - 1.925V min.	
LOGIC "0" LEVEL (VoL)	Vcc - 2.175V max.	
OUTPUT PEAK TO PEAK SWING	250mV min. 350mV typical, 460mV max.	
OUTPUT OFFSET (RL = 100Ω)	1.125V min., 1.25V typical, 1.375V max.	
LVDS OUTPUT LOAD	100 Ω	
AGING @ 25°C	± 3.0ppm max.	
PHASE JITTER (12KHz ~ 20MHz offset)	12.000MHz ~ 200.000MHz: 1.0pS max. 201.000MHz ~ 800.000MHz: 3.0pS max.	
TRISTATE OPTION	T1: Pin# 1 En/Dis Pin#2: N/C, T2: Pin#1 N/C Pin# 2: En/Dis	

PACKAGE DIMENSIONS


Unit : mm

Pin Configuration	
1	N.C. or En/Dis
2	N.C. or En/Dis
3	GND
4	Output
5	C - output
6	VDD

SOLDER PATTERN

REFLOW PROFILE

PART NUMBERING GUIDE


Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. No liability is assumed as a result of their use or application.