


CERAMIC SMD LVPECL OUTPUT OSCILLATOR (7.0 x 5.0 x 1.6mm)

FEATURES:




- HIGH FREQUENCY
- ULTRA LOW PHASE JITTER PERFORMANCE
- ENABLE / DISABLE

RoHS
Compliant



MODEL	TPSM	
SUPPLY VOLTAGE	2.5V	3.3V
FREQUENCY RANGE	12.000MHz ~ 312.500MHz	12.000MHz ~ 800.000MHz
FREQUENCY STABILITY*	±15ppm ~ ±100ppm*	
OUTPUT	LVPECL	
OPERATING TEMPERATURE	0°C to 70°C, Option: -40°C to 85°C	
STORAGE TEMPERATURE	-55°C to 125°C	
INPUT CURRENT	80mA max.	
DUTY CYCLE	50% ±5% (50% of waveform)	
RISE TIME / FALL TIME	300pS typical, 600pS max.	
OUTPUT VOLTAGE HIGH	VDD - 1.025VDC min.	
OUTPUT VOLTAGE LOW	VDD - 1.620VDC max.	
OUTPUT PEAK TO PEAK SWING	600mV min. 800mV typical	
LOAD	50 Ω typical	
START UP TIME	10mS max.	
AGING @ 25°C	± 3.0ppm max.	
PHASE JITTER (12KHz ~ 20MHz offset)	12.000MHz ~ 200.000MHz: 1.0pS max. 201.000MHz ~ 800.000MHz: 3.0pS max.	
TRISTATE OPTION	T1: Pin# 1 En/Dis Pin#2: N/C, T2: Pin#1 N/C Pin# 2: En/Dis	


PACKAGE DIMENSIONS




Unit : mm

Pin Configuration	
1	N.C. or En/Dis
2	N.C. or En/Dis
3	GND
4	Output
5	C - output
6	VDD


SOLDER PATTERN

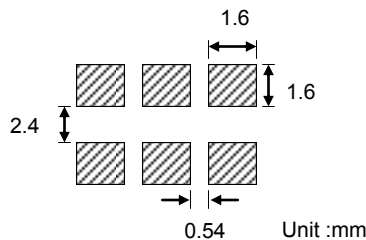

REFLOW PROFILE

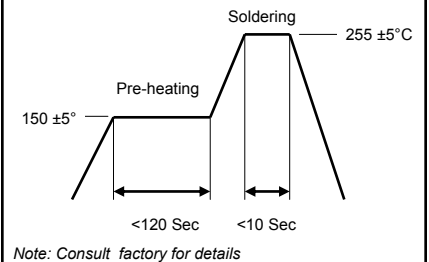

PART NUMBERING GUIDE

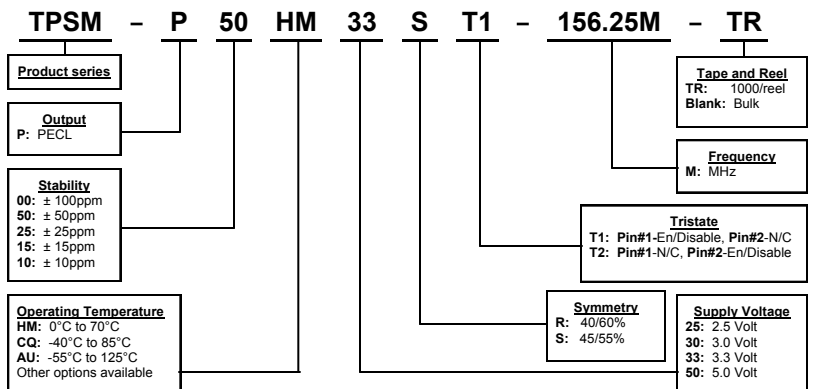

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.