


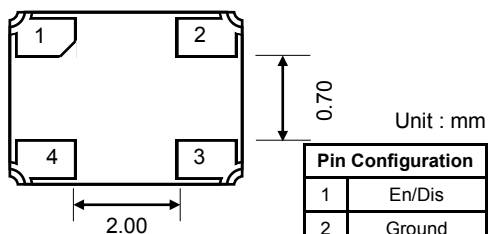

MINIATURE SMD REAL TIME OSCILLATOR (4.0 x 2.5 x 1.0mm)
FEATURES:

- HCMOS OUTPUT @ 32.768KHz
- LOW VOLTAGE
- LOW CURRENT

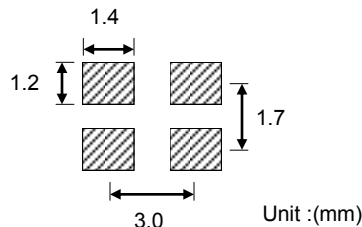
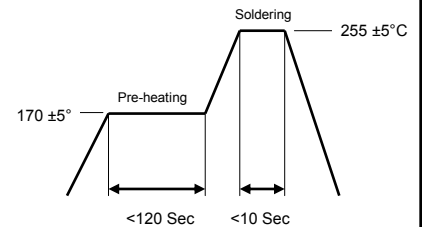
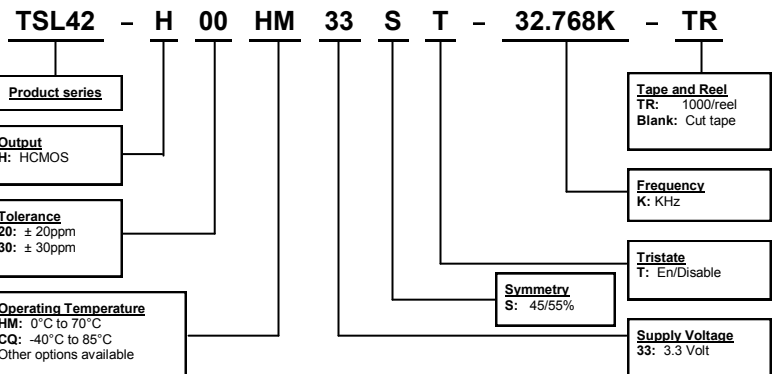
RoHS
Compliant



MODEL	TSL42
FREQUENCY RANGE	32.768KHz
SUPPLY VOLTAGE	3.3V ± 10%
FREQUENCY TOLERANCE @ 25°C	± 30ppm max.
OUTPUT	HCMOS
OPERATING TEMPERATURE	-40°C to 85°C
INPUT CURRENT	1.5uA max (VDD = 3.3V without load over -40 to 85°C)
DUTY CYCLE	45/55% max. @ 1/2 VDD level
RISE/FALL TIME	100nS typical, 200nS max
OUTPUT VOLTAGE VoH	VDD - 0.4V min. (CL = 15pF at 25°C)
OUTPUT VOLATGE VoL	VDD - 0.4V max. (CL = 15pF at 25°C)
OUTPUT LOAD	15pF max.
START UP TIME	3.0 sec max.
AGING	± 5.0ppm max. @ 25°C ± 3°C
PIN# 1 TRISTATE	ViH 90% VDD min. = Oscillation ViL 10% VDD max. = High impedance
DISABLE PHASE DELAY TIME	100nS max.
ENABLE PHASE DELAY TIME	3.0 sec max.

PACKAGE DIMENSIONS


Pin Configuration	
1	En/Dis
2	Ground
3	Output
4	Vcc

SOLDER PATTERN

REFLOW PROFILE

PART NUMBERING GUIDE


Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.