






## TCXO/VCTCXO ULTRA MINIATURE SMD (5.0 x 3.2 x 1.4mm)

**FEATURES:**

- WIDE FREQUENCY RANGES
- TIGHT STABILITY AVAILABLE
- STANDARD PACKAGE

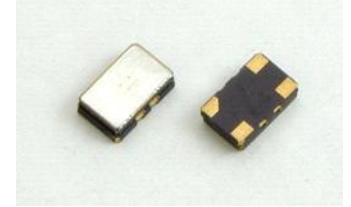

MODEL		TX - T
FREQUENCY		10 ~ 40 MHz
FREQUENCY STABILITY		±1.0ppm to ±10ppm
OPERATING TEMPERATURE		-10°C to 70°C(standard), or see P/N guide for more options
POWER SUPPLY	VOLTAGE	+5.0V <sub>DC</sub> ±5%, or +3.3V <sub>DC</sub> ±5%
	CURRENT	CSW: 2.0mA max, CMOS: 8.0mA max.
OUTPUT	SYMMETRY	50% ±10%, 50% ±5% available
	RISE/FALL TIME	CSW: N/A, CMOS: 5 nS typ, 10 nS max
	FAN OUT	Clipped sine wave (10KΩ // 10pF) or CMOS (15pF)
STARTUP TIME HARMONICS		10.0mS max. 0.5 dBc max.
PULLABILITY OPTION		±5.0 ~ ±12ppm
PHASE NOISE		-130dBc/Hz at 1KHz offset
AGING		±1.0ppm max / year

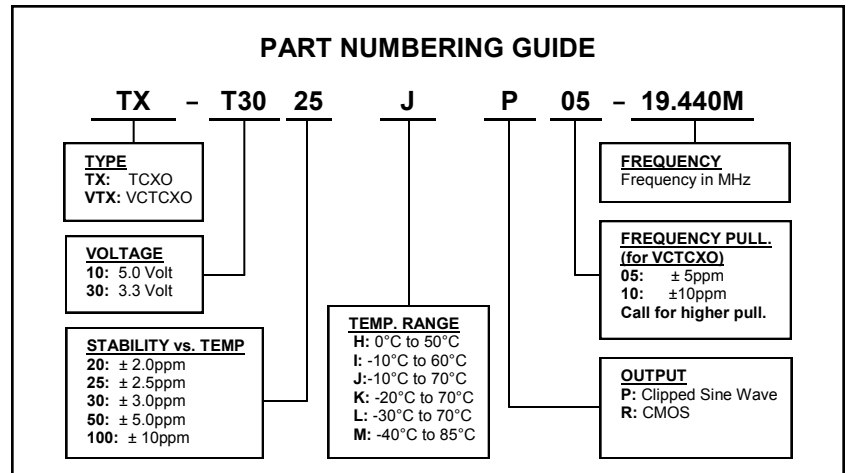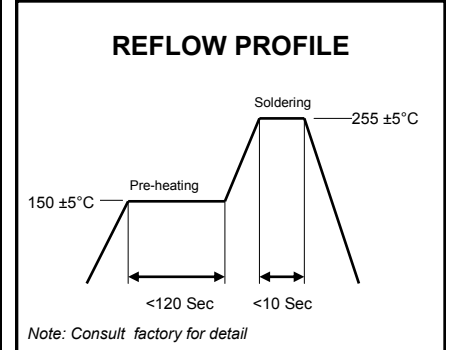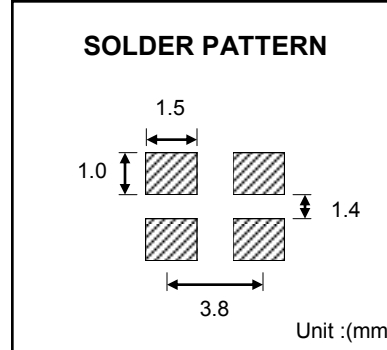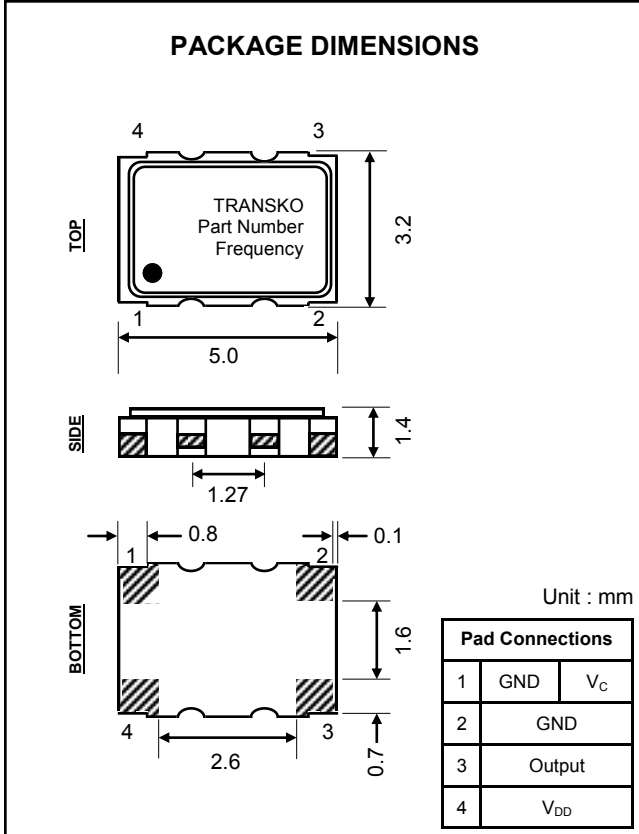

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.