





- MINIATURE SMD PACKAGE
- LOW PROFILE DESIGN
- CAPABLE OF REFLOW
- CUSTOM SPECIFICATION AVAILABLE

RoHS  
Compliant



MODEL	FREQUENCY	TUNING VOLTAGE	PHASE NOISE @10KHz	2nd HARMONICS	POWER
TAV-5P230A	220~240 MHz	0.5~4.5 V	-103 dBc/Hz	-20 dBc	0 dBm
TAV-5P550	510~590 MHz	0~5 V	-103 dBc/Hz	-20 dBc	2 dBm
TAV-5P950	925~975 MHz	0.5~4.5 V	-103 dBc/Hz	-20 dBc	5 dBm
TAV-5P1150A	1050~1250 MHz	0.2~4.8 V	-93 dBc/Hz	-25 dBc	3 dBm
TAV-5P1900C	1800~2000 MHz	0.2~4.8 V	-98 dBc/Hz	-25 dBc	0 dBm
TAV-5P2070	2010~2130 MHz	0.5~4.5 V	-98 dBc/Hz	-25 dBc	0 dBm
TAV-5P2557	2542~2573 MHz	0.5~4.5 V	-97 dBc/Hz	-25 dBc	4 dBm


### PACKAGE DIMENSIONS

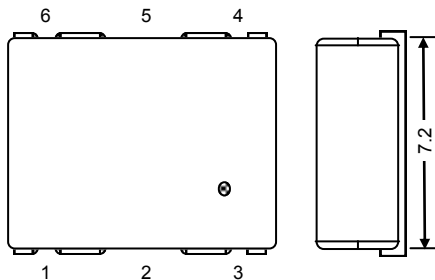

Unit : mm  
Tolerance: ± 0.2


Pin Configuration	
1	Tuning Voltage
2	GND
3	Supply Voltage
4	RF OUT
5	GND
6	NC

### SOLDER PATTERN



Unit :mm

### REFLOW PROFILE

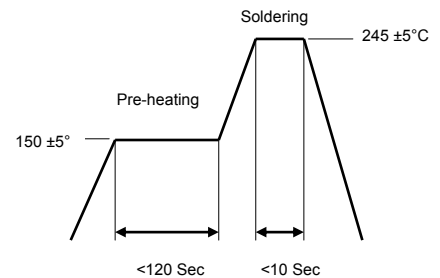

Note: Consult factory for detail