

PLASTIC MOLDED SMD HCMOS VCXO (14.0 x 9.6 x 4.6mm)





FEATURES:

- HCMOS HIGH FREQUENCY RANGE
- LOW JITTER / LOW CURRENT
- SUITABLE FOR REFLOW

RoHS
Compliant



MODEL	TPV	
INPUT VOLTAGE	3.3 Vdc ±10%	5.0 Vdc ±10%
FREQUENCY RANGE	1.000 MHz ~ 200.000 MHz	
TEMPERATURE STABILITY	±20 ppm ~ ±100 ppm	
OPERATING TEMPERATURE	0°C ~ 70°C to -40°C ~ 85°C	
STORAGE TEMPERATURE	-55°C to 125°C	
INPUT CURRENT	55 mA max.	
OUTPUT '0' LEVEL (Vol)	0.1 Vcc max	
OUTPUT '1' LEVEL (Voh)	0.9 Vcc min	
SYMMETRY	45/55% or 40/60%	
RISE & FALL TIME	10 nS Max.	
PULLABILITY	± 50 ppm Min ±150 ppm max	
CONTROL VOLTAGE	1.65V ±1.65V	2.5V ±2.0V
LINEARITY	10% max.	
START UP TIME	10 mS max.	
OUTPUT LOAD	15 pF or 10TTL	30 pF or 10TTL
PHASE JITTER RMS	10 pS max	

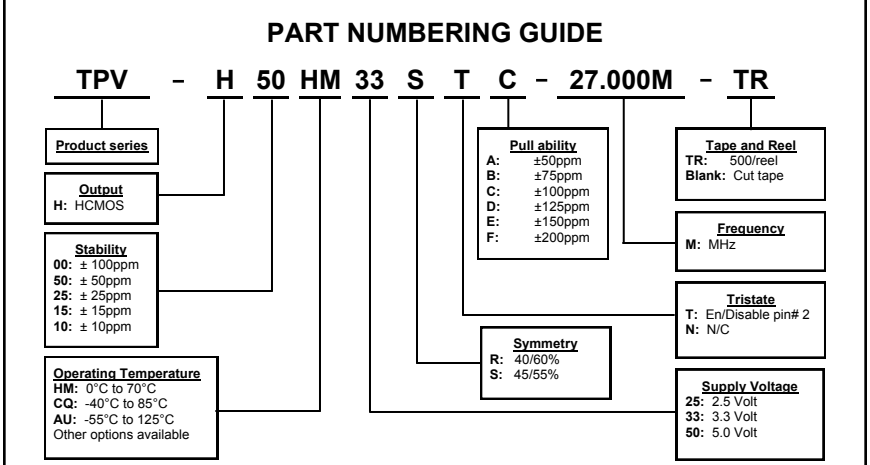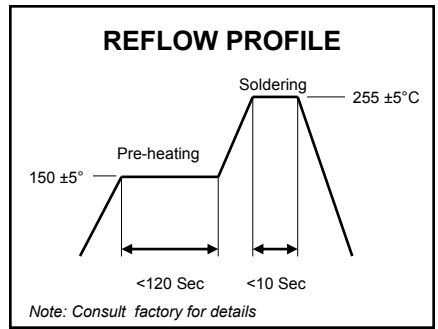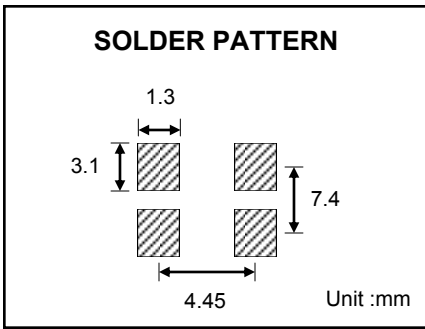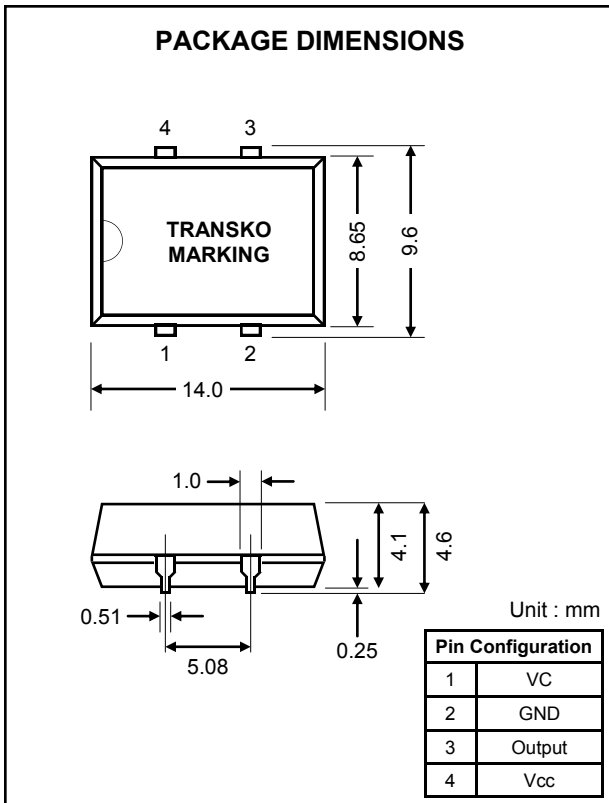

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.