






**MINIATURE CERAMIC SMD VCXO (7.0 x 5.0 x 1.8mm)**
**FEATURES**

- HIGH FREQUENCY VCXO
- LVPECL / LVDS OUTPUT VCXO
- LOW NOISE / LOW CURRENT

RoHS  
Compliant



SUPPLY VOLTAGE	2.5V	2.8V	3.3V
FREQUENCY RANGE	65.000MHz ~ 320.000MHz	65.000MHz ~ 320.000MHz	1.500MHz ~ 800.000MHz
STANDARD FREQUENCY	19.44, 44.736, 74.250, 74.1758, 76.800, 77.76, 106.25, 122.88, 155.52, 156.25, 153.60, 161.1328, 200.00, 312.50, 800.00		
FREQUENCY STABILITY*	± 10ppm ~ ± 100ppm		
OPERATING TEMPERATURE RANGE	Standard: 0°C to 70°C, Option: -40°C to 85°C		
FREQUENCY DEVIATION	± 50ppm min. Option: ± 70ppm min., ± 100ppm min.		
CONTROL VOLTAGE RANGE	1.25V ± 1.25V	1.40V ± 1.40V	1.65V ± 1.35V
SUPPLY CURRENT	LVPECL: 75mA max. / LVDS: 45mA max LVPECL: 100mA max. / LVDS: 80mA max		
1.000MHz ~ 65.000MHz			
65.000MHz ~ 320.000MHz			
OUTPUT LEVEL HIGH "1"	PECL: 1.475V min. / LVDS: 0.90V min.	PECL: 1.775V min. / LVDS: 0.90V min.	PECL: 2.275V min. / LVDS: 0.90V min.
OUTPUT LEVEL LOW "0"	PECL: 1.095V max. / LVDS: 1.60V max.	PECL: 1.395V max / LVDS: 1.60V max.	PECL: 1.680V max./ LVDS: 1.60V max.
RISE AND FALL TIME	1.0nS max.		
TRISTATE	2.0V min.	2.0V min.	2.275V min.
LINEARITY	10% max.		
MODULATION BANDWIDTH	25.0KHz min.		
INPUT IMPEDANCE	50KΩ		
PHASE JITTER	0.3pS ~ 3.0pS max. Typical ~0.5pS (Offset 12KHz ~ 20MHz)		

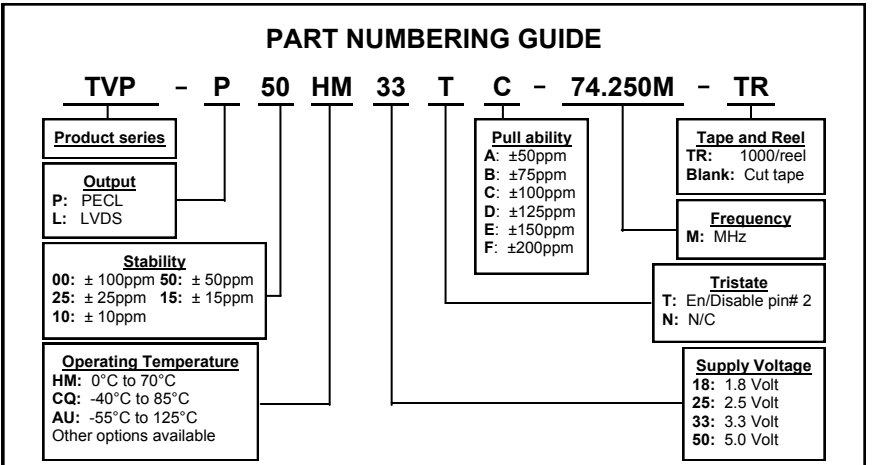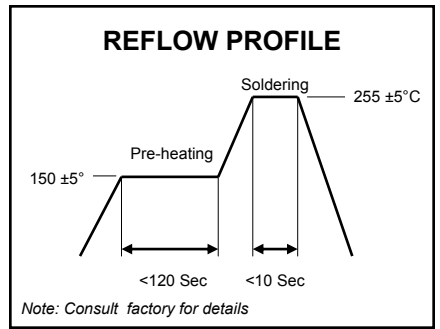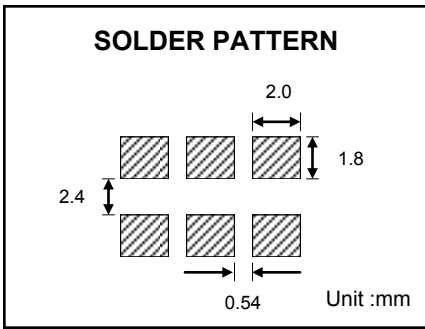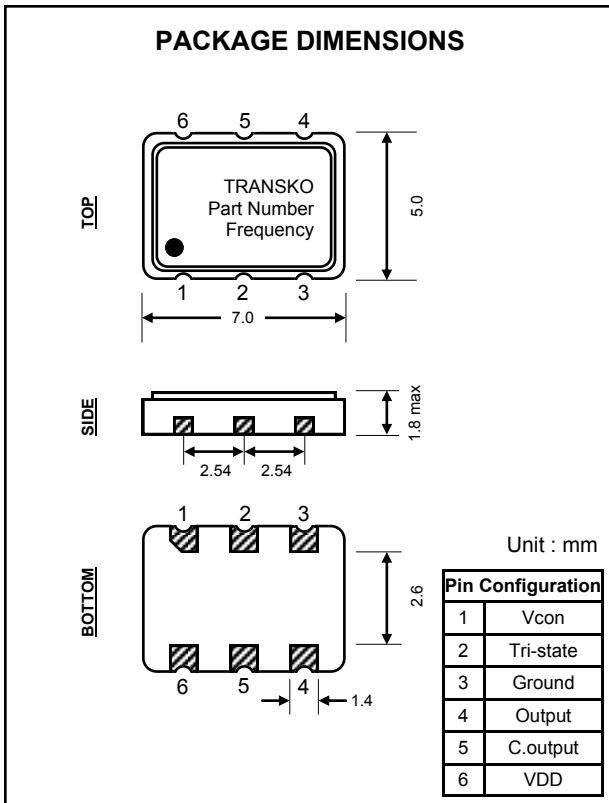

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.