

- 60.0 MHz IF SAW Filter / 10.11 MHz Bandwidth
- Revision 0: 08. JAN. 2009


## Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-	25	-
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	D1			
Length x Width	mm <sup>2</sup>	-	20.0 x 9.8	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	60.0	-
Insertion Loss at Fo	dB	-	20.6	22.5
Group Delay Variation (Fo±4.42MHz)	ns	-	49	100
Absolute Delay	us	-	2.08	-
Passband Ripple (Fo±4.42MHz)	dB	-	0.4	1.00
Bandwidth at -1dB	MHz		10.11	-
Bandwidth at -3dB	MHz	10.3	10.44	
Bandwidth at -25dB	MHz	-	11.55	11.60
Bandwidth at -40dB	MHz		11.84	-
Ultimate Rejection	dB	50	53	-
Temperature Coefficient of Frequency	ppm/°C		-72	

**Notes :** (1) With Matching Network (Ref. Testing Environment Circuit as shown below).  
Those impedances could be modified with different impedance values and/or structures, if necessary.


## Package Dimensions

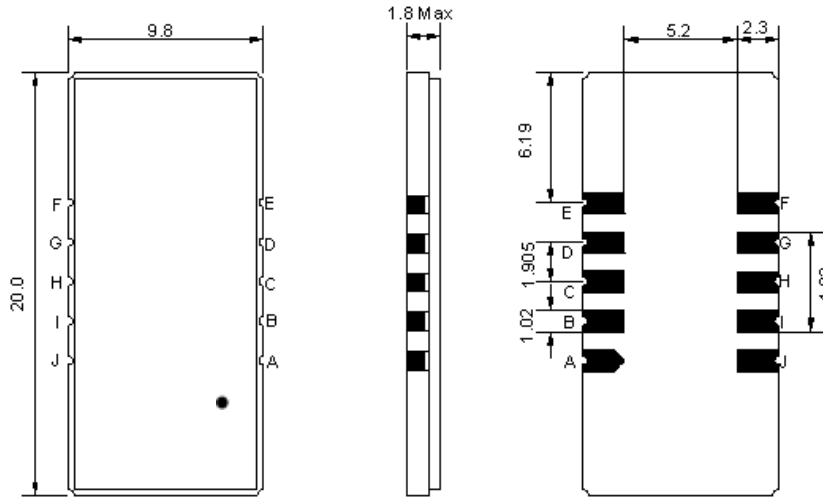

- ② TRANSKO: Brand
- ② TA06010A: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I	Ground
J	Input
E	Output

## Testing Environment

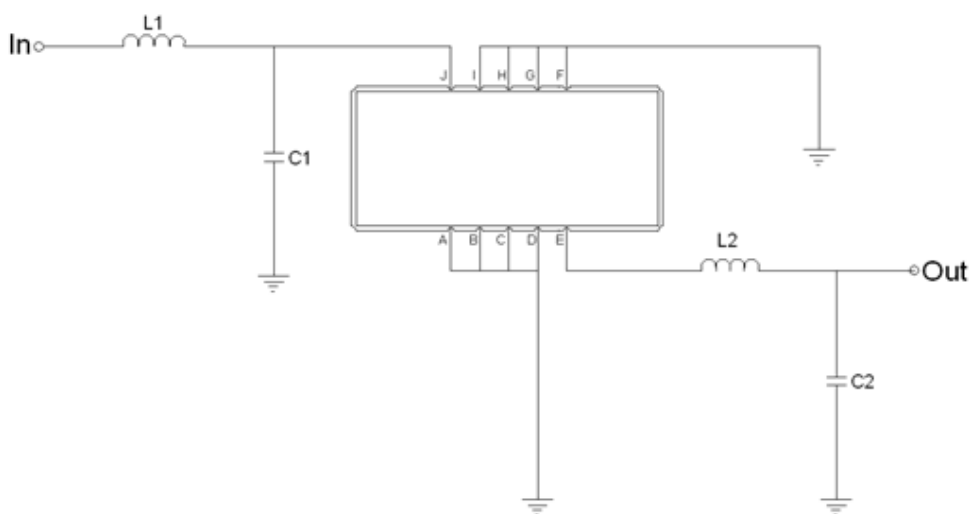



Test Fixture & Values	
Input	L1=120 nH, C1=11 pF
Output	L2=100 nH, C2=22 pF
Source/Load Impedance	50 $\Omega$

## Frequency Characteristics

### Frequency Response



**Bandwidth at -1.0 dB**

**Bandwidth at -3.0 dB**

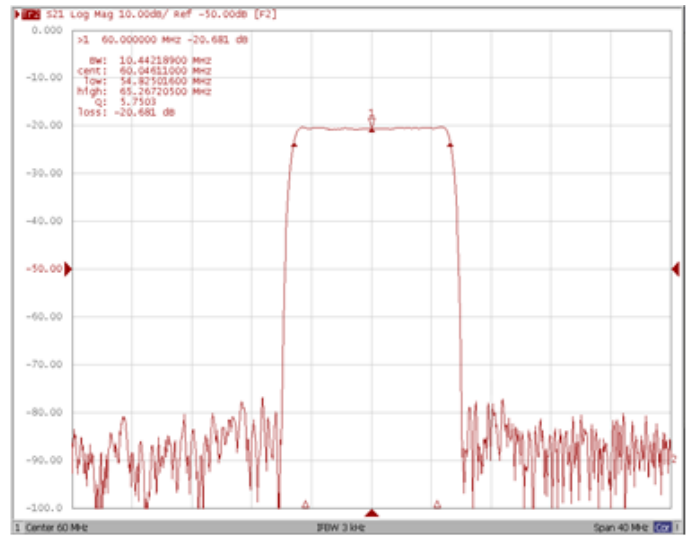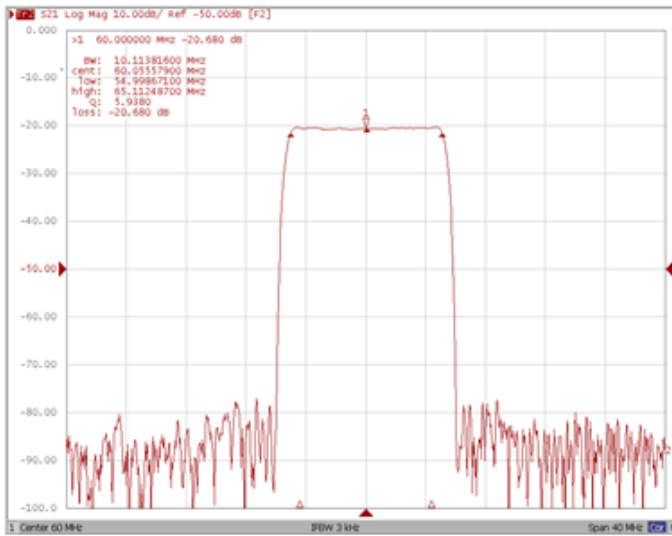


**Bandwidth at -25.0 dB**

**Bandwidth at -40.0 dB**

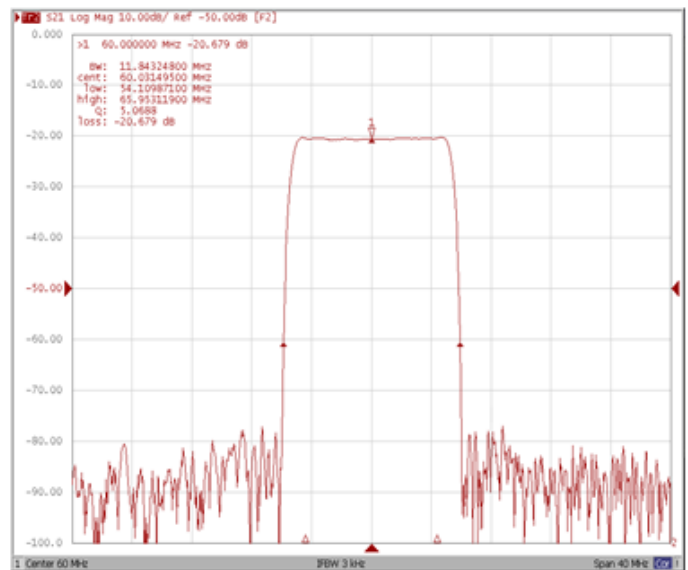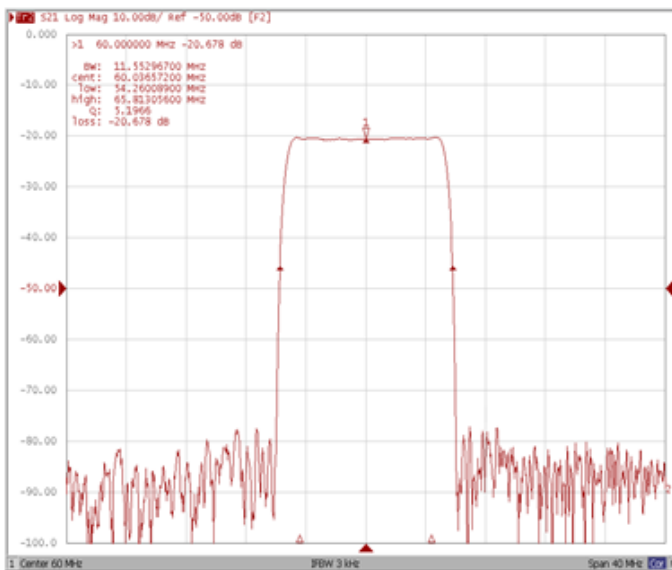


**Frequency Response**


**Ripple Variation Fo±4.42MHz**

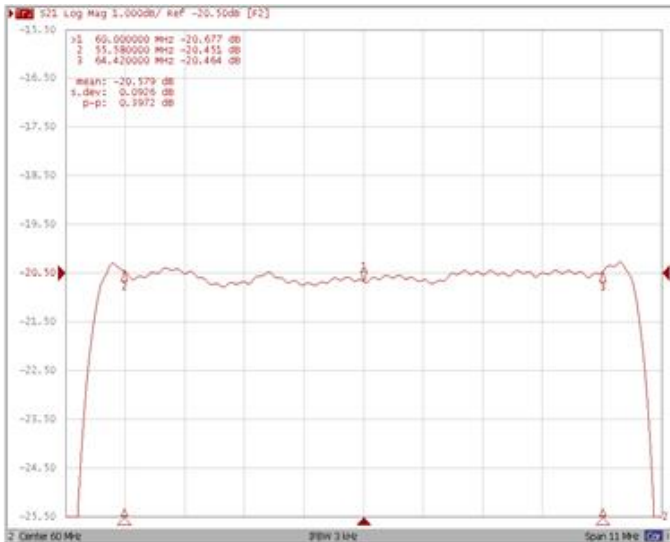

**Group Delay Variation Fo±4.42MHz**

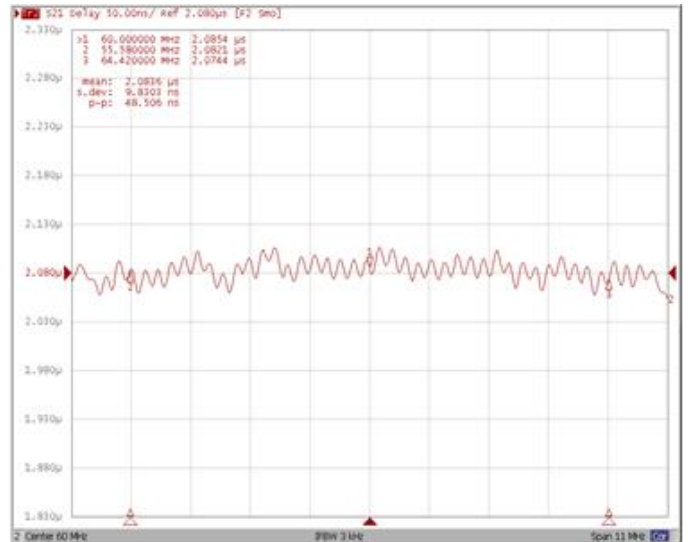

**Smith Chart**

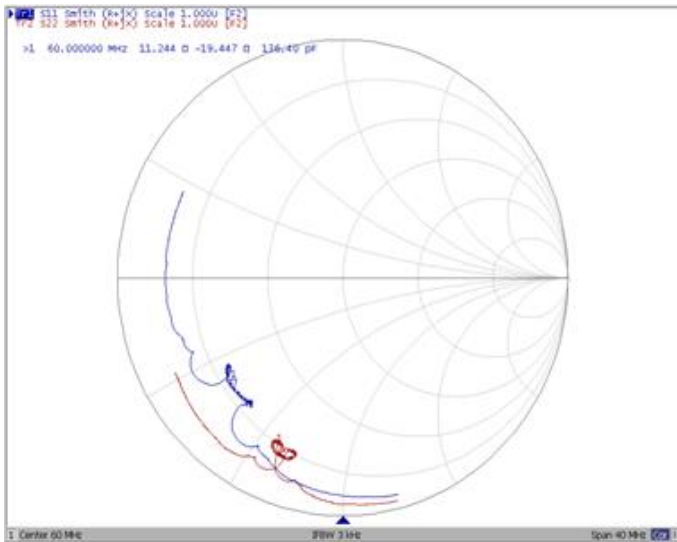

**VSWR**

