

- 75.0 MHz IF SAW Filter / 26.17 MHz Bandwidth
- Revision 0: 12. Aug. 2009


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-20	-	70
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	D1			
Length x Width	mm ²	-	20.0 x 9.8	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	75.0	-
Insertion Loss at Fo	dB	-	27.1	29.0
Group Delay Variation at Fo±12.48MHz	nsec	-	18	40
Absolute Delay at Fo	usec	-	1.97	-
Passband Ripple Variation at Fo±12.48MHz	dB	0.60	0.85	1.20
Bandwidth at -1dB	MHz	25.90	26.17	-
Bandwidth at -10dB	MHz	-	27.15	-
Bandwidth at -20dB	MHz	-	27.65	-
Bandwidth at -40dB	MHz	-	28.16	28.30
Relative Attenuation				
Lower Sidelobe	dB	-	52	-
Upper Sidelobe	dB	-	52	-
Temperature Coefficient	ppm/°C	-	-72	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

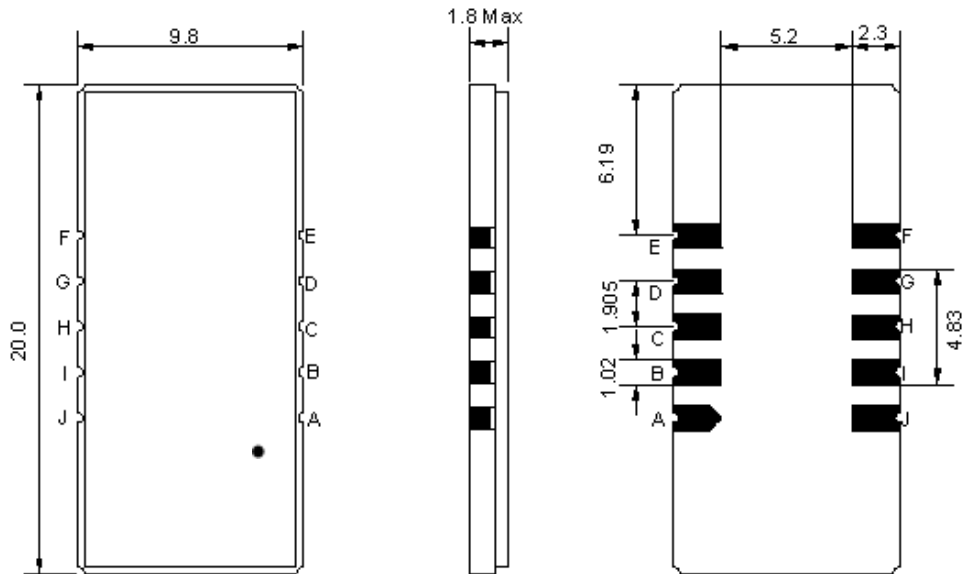

- ① TRANSKO: Brand
- ② TA07526C: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I	Ground
J	Input
E	Output

Testing Environment

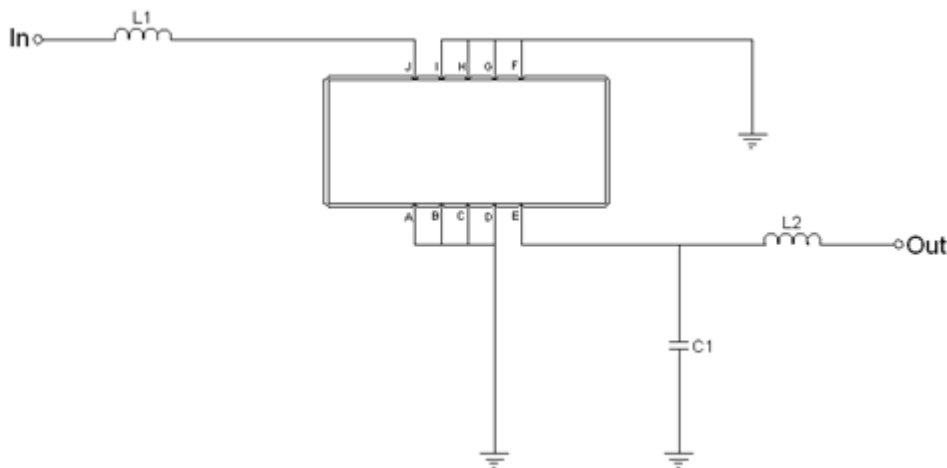


Test Fixture & Values	
Input	L1 = 120 nH
Output	L2 = 120 nH, C1=3.3pF
Source/Load Impedance	50 Ω


Frequency Characteristics

Frequency Response


Bandwidth at -1.0 dB

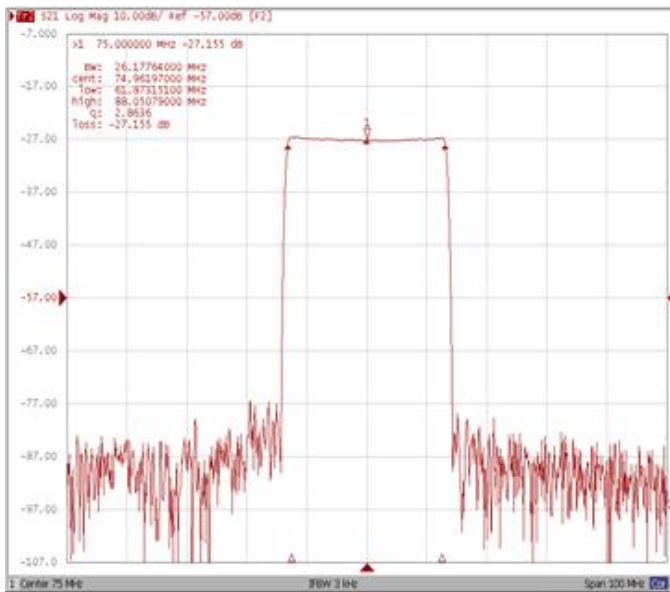


Bandwidth at -10.0 dB

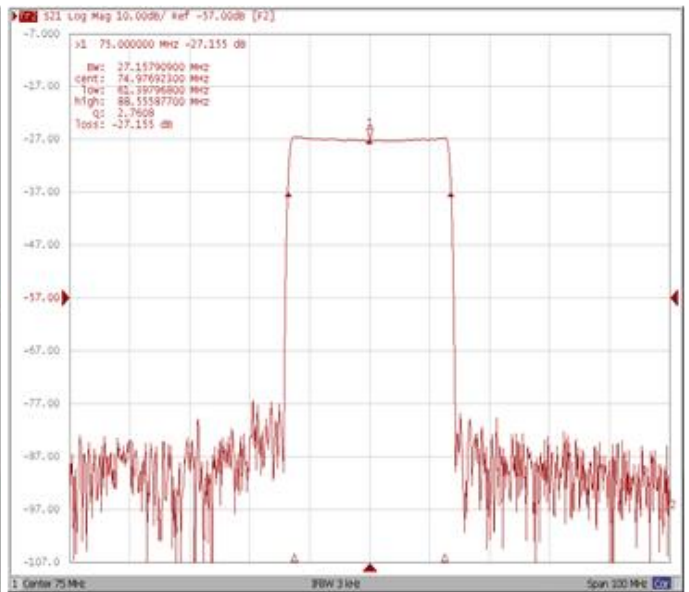

Bandwidth at -20.0 dB

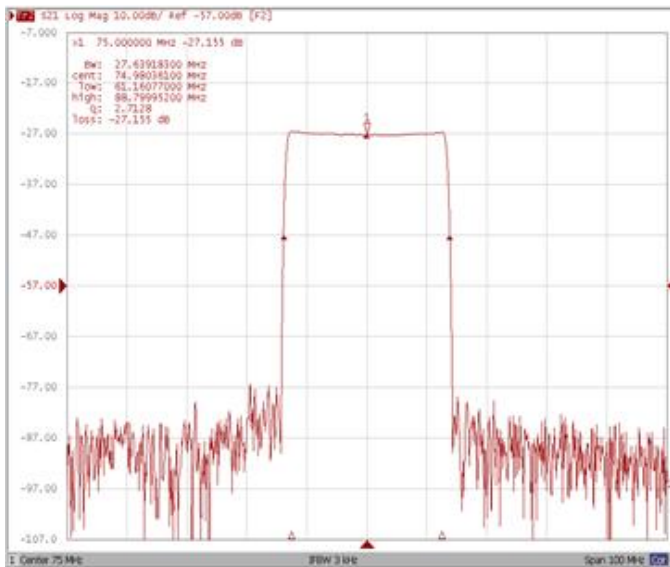


Bandwidth at -40.0 dB

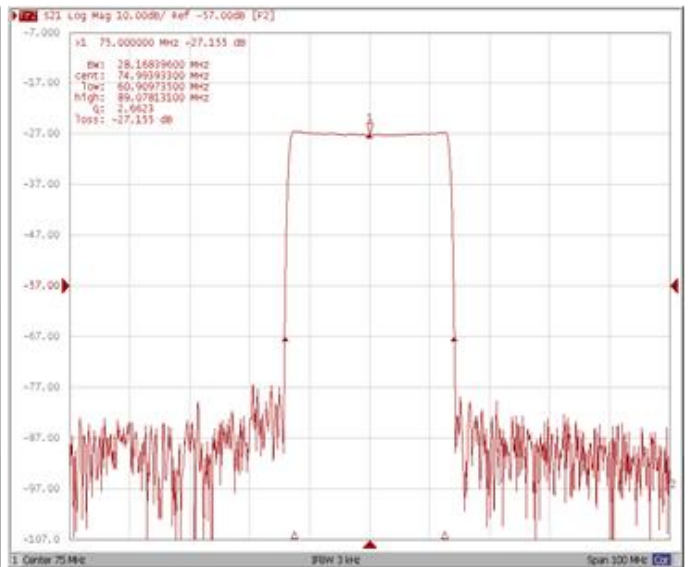


Frequency Response


Ripple Variation Fo±12.48MHz

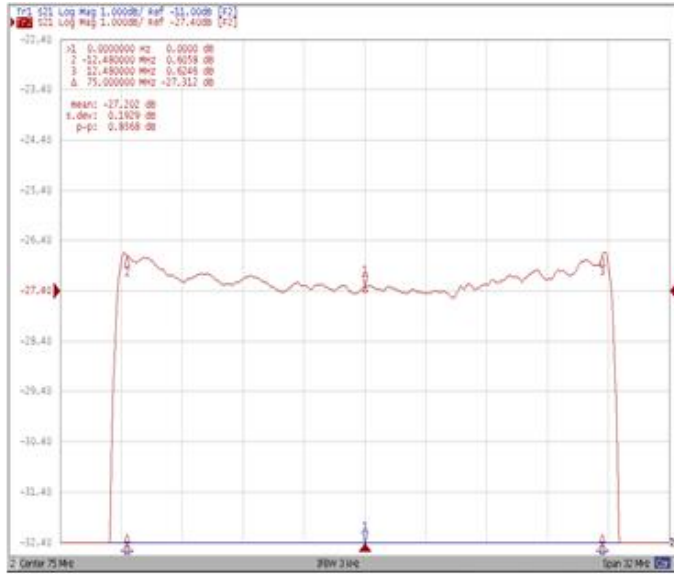

Group Delay Variation Fo±12.48MHz

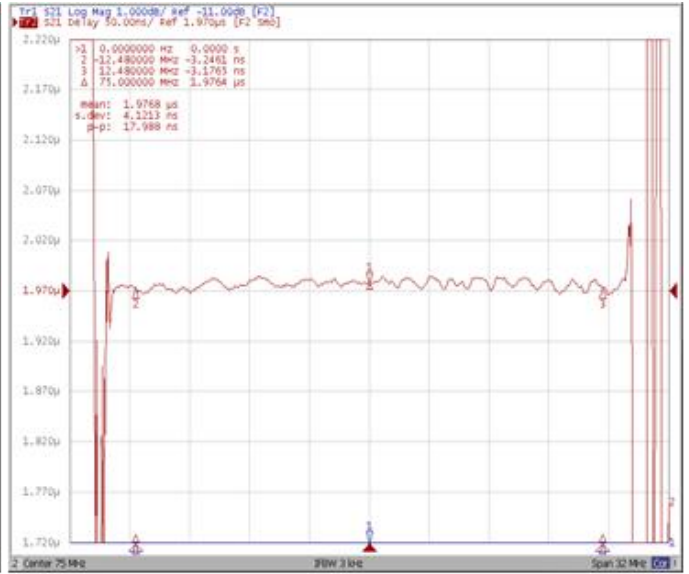

Smith Chart

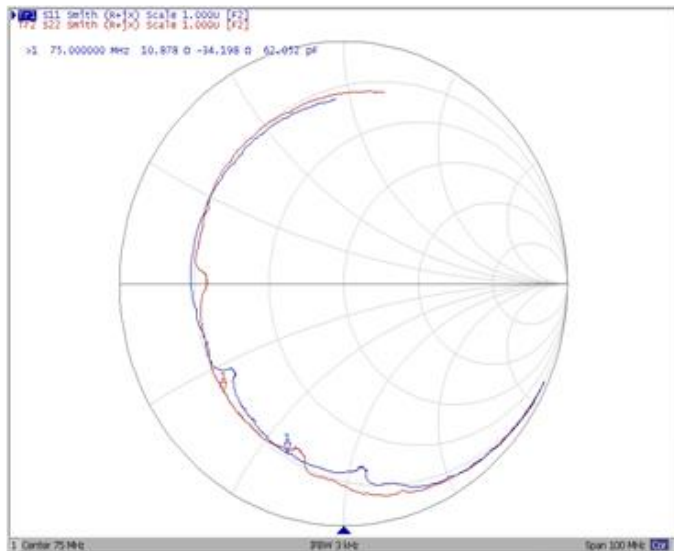

VSWR

