

- 90.0 MHz IF SAW Filter / 29.46 MHz Bandwidth
- Revision 0: 07. Oct. 2010


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-	25	-
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	90.0	-
Insertion Loss at Fo	dB	-	25.00	27.00
Group Delay Variation (Fo±14.32MHz)	nsec	-	26	70
Absolute Delay	usec	-	1.64	-
Passband Ripple (Fo±14.32MHz)	dB	-	0.55	1.00
Bandwidth at -1dB	MHz	29.20	29.46	-
Bandwidth at -3dB	MHz	-	29.97	-
Bandwidth at -40dB	MHz	-	31.96	32.10
Ultimate Rejection	dB	45	48	-
Temperature coefficient	ppm/°C	-	-72	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

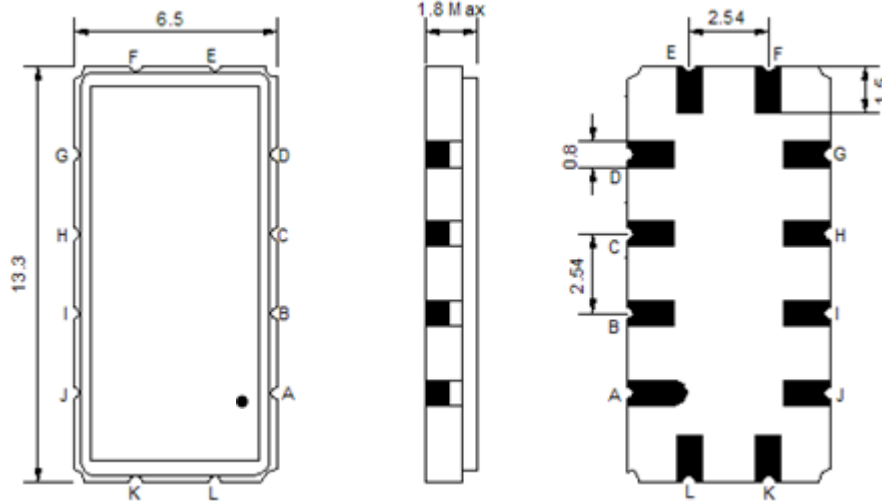

- ① **TRANSKO:** Brand
- ② **TA09029A:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

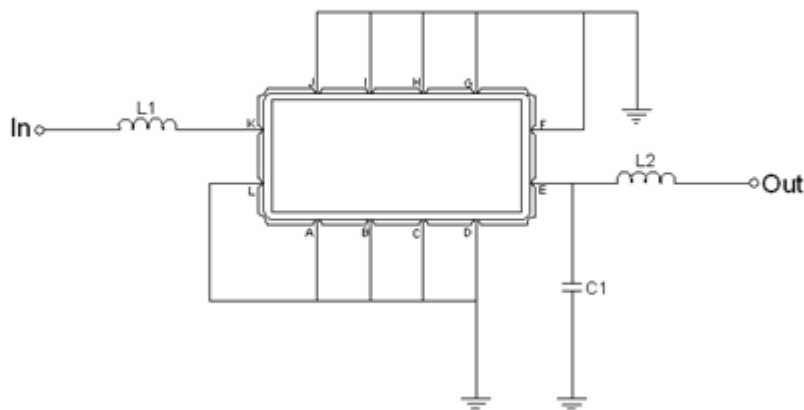



Test Fixture & Values	
Input	L1 = 150 nH
Output	L2 = 150 nH, C1 = 6 pF
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -3.0 dB

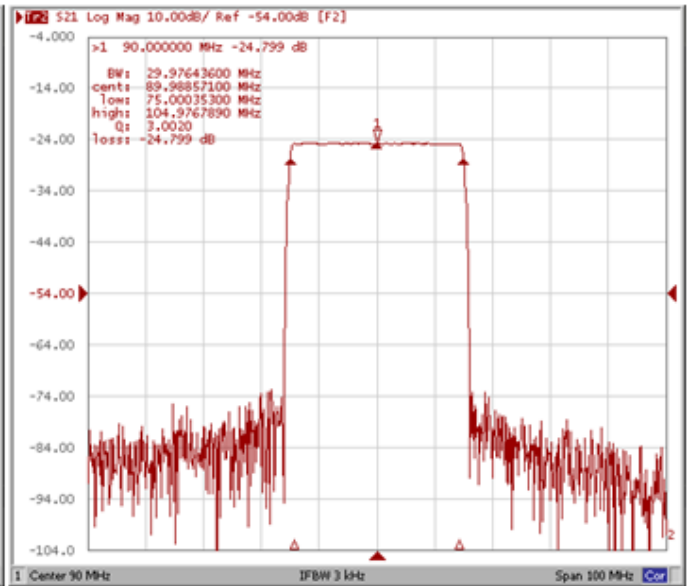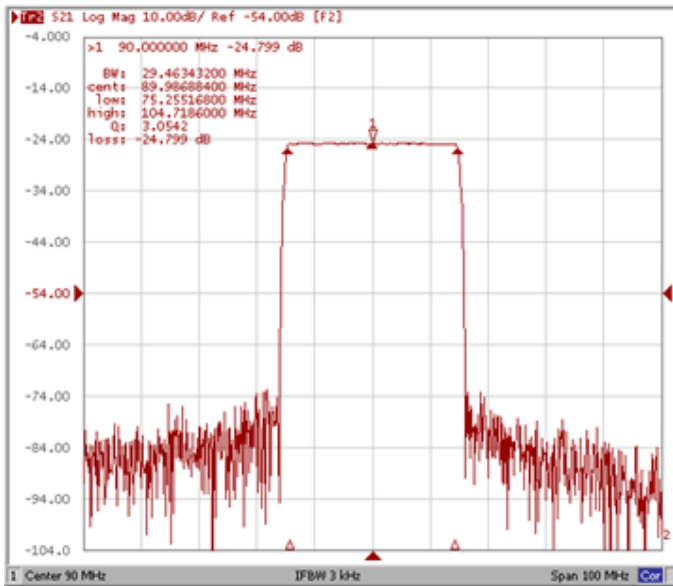


Bandwidth at -40.0 dB

Wide Band

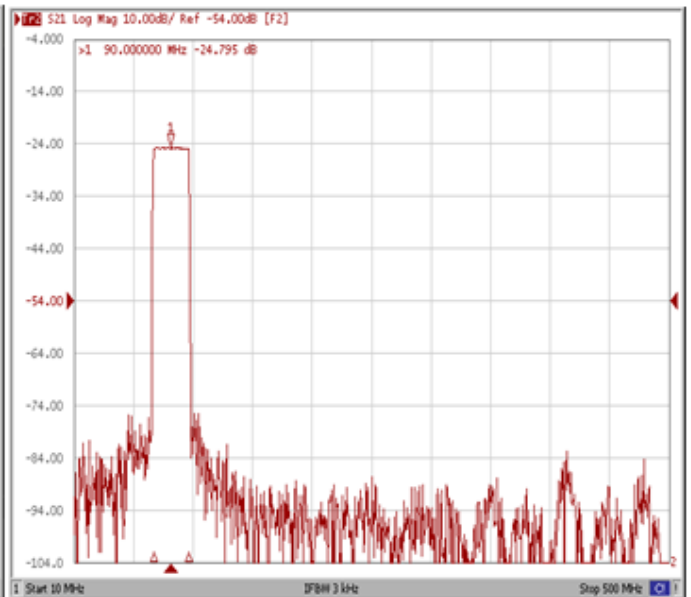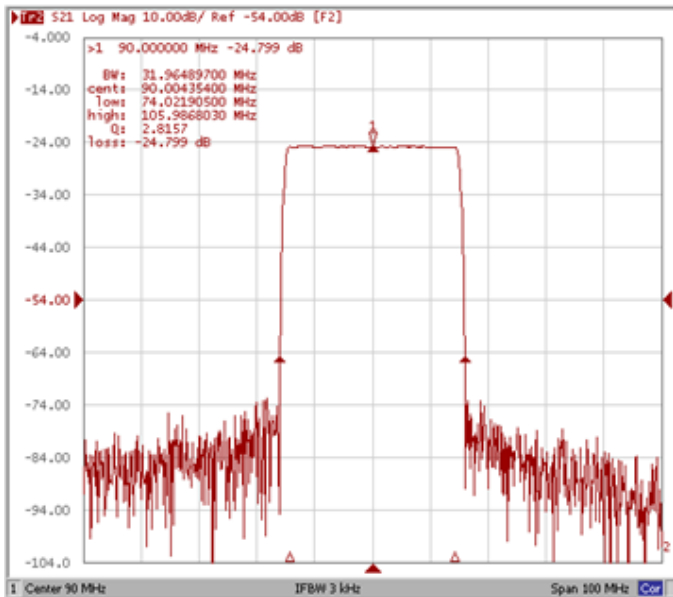


Frequency Response


Ripple Variation Fo±14.32MHz

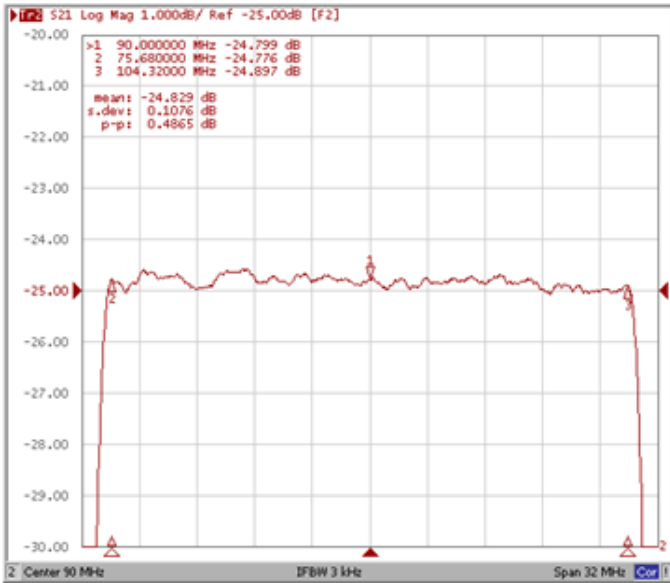

Group Delay Variation Fo±14.32MHz

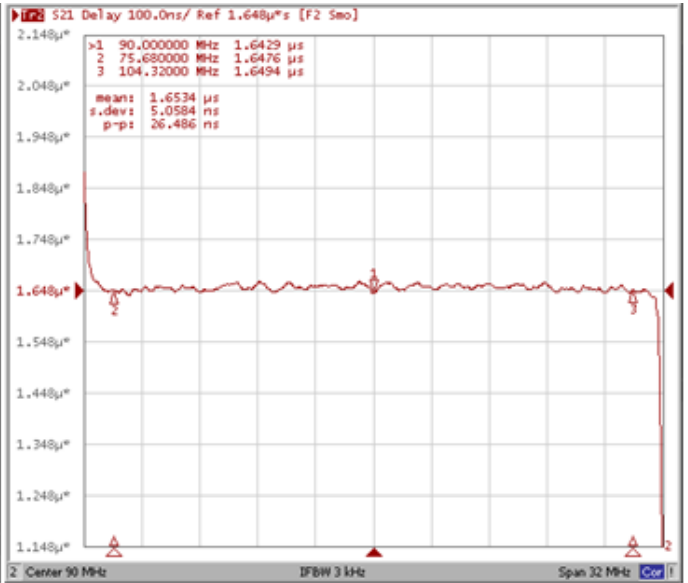

Smith Chart

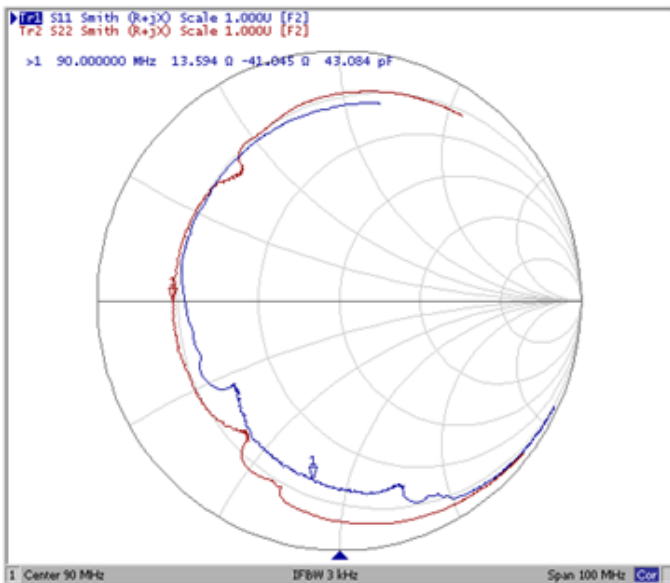

VSWR

