

- 110.8 MHz IF SAW Filter / 7.70 MHz Bandwidth
- Revision 0: 29. Sep. 2009


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-5	-	+65
Storage Temperature Range	°C	-30	-	+85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	110.8	-
Insertion Loss at Fo	dB	-	25.6	27.0
Group Delay Variation at Fo ±3.50 MHz	ns	-	22	50
Absolute Delay at Fo	us	-	2.27	-
Amplitude Ripple at Fo ±3.50 MHz	dB	-	0.50	-
Bandwidth at -1dB	MHz	7.50	7.70	-
Bandwidth at -3dB	MHz	-	8.20	-
Bandwidth at -25dB	MHz	-	9.90	10.10
Bandwidth at -40dB	MHz	-	10.35	10.60
Relative Attenuation				
Lower Sidelobe	dB	47	53	-
Upper Sidelobe	dB	47	53	-
Temperature Coefficient	ppm/°C	-	-23	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

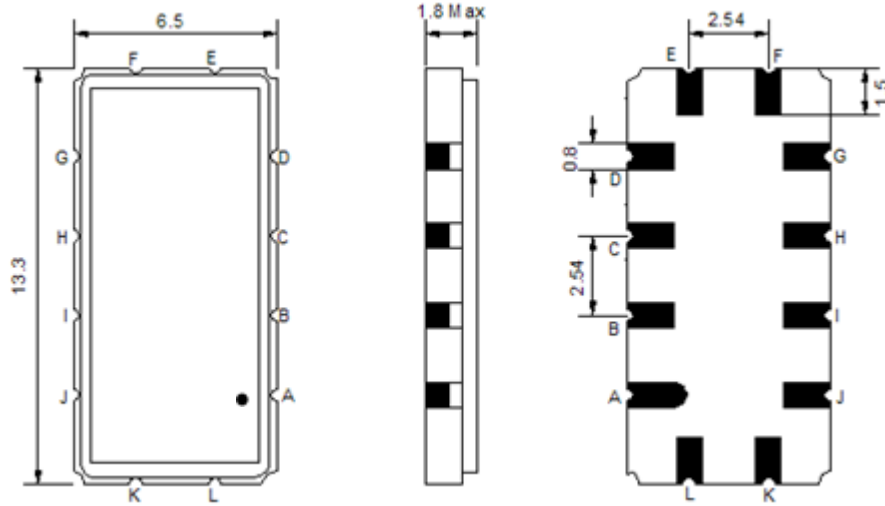

- ① **TRANSKO:** Brand
- ② **TA11007A:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

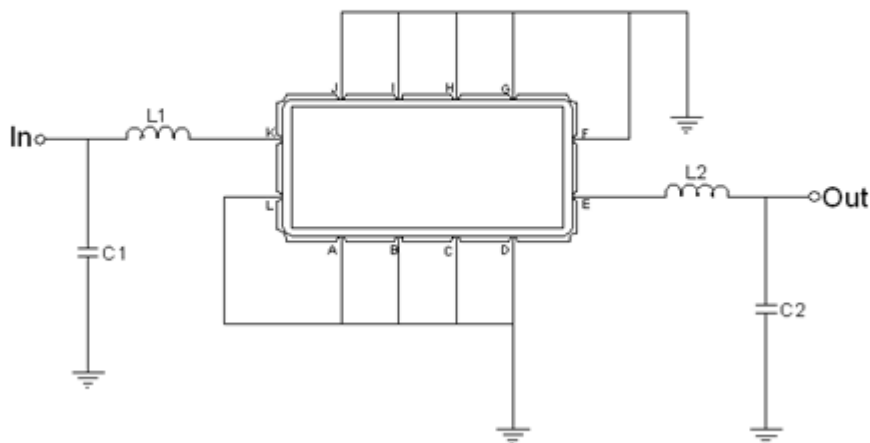



Test Fixture & Values	
Input	L1 = 100 nH , C1 = 9 pF
Output	L2 = 100 nH , C2 = 9 pF
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -3.0 dB

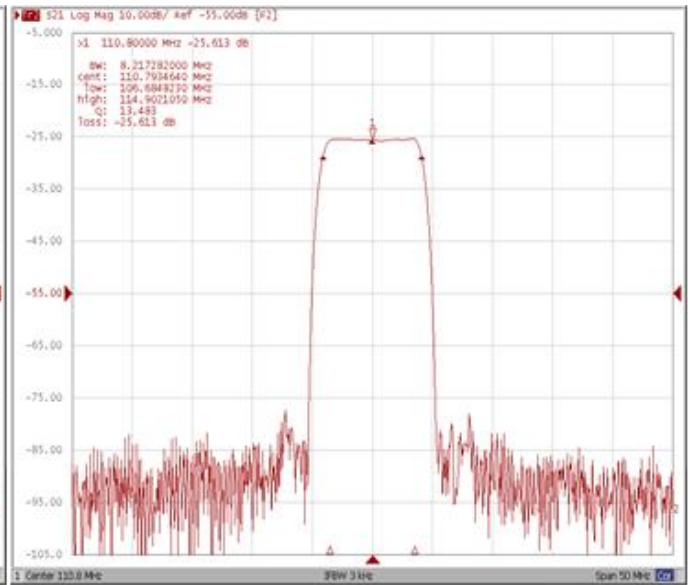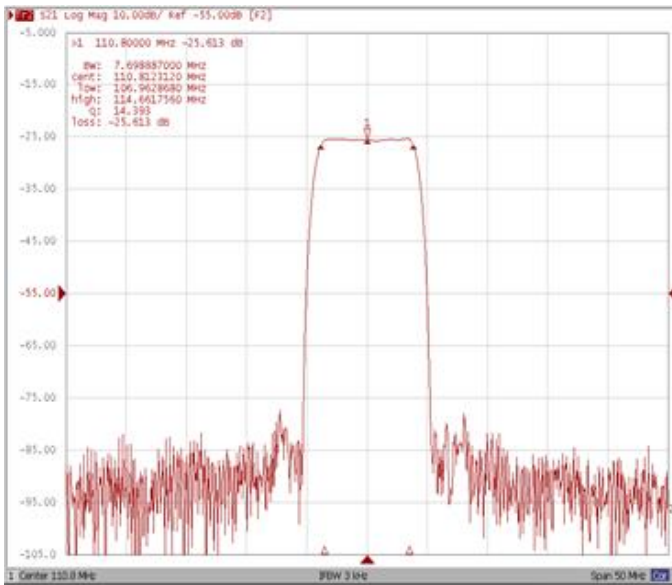

Bandwidth at -25.0 dB

Bandwidth at -40.0 dB

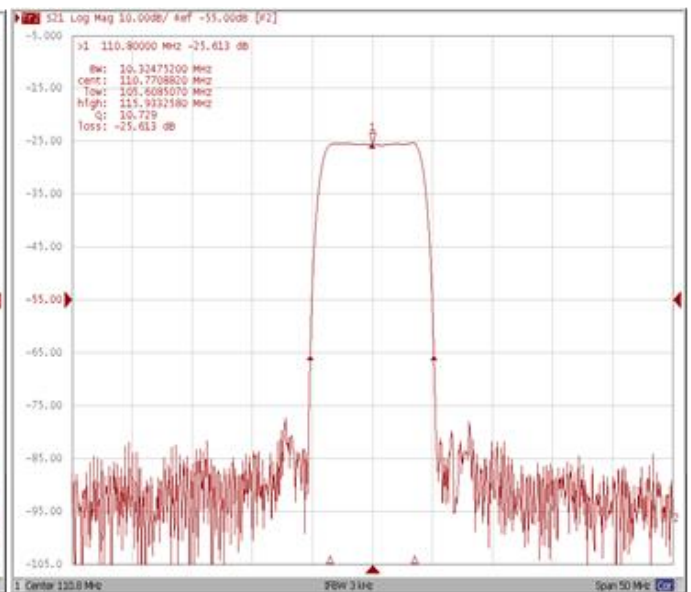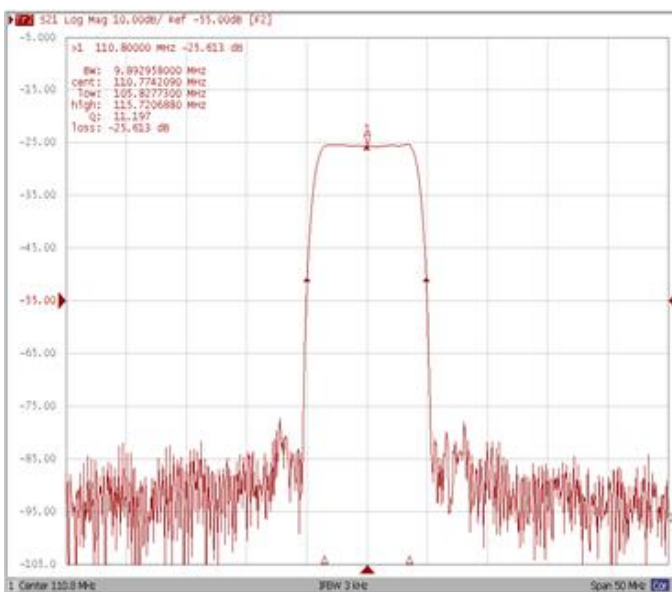

Frequency Response

Ripple Variation Fo ±3.5 MHz

Group Delay Variation Fo ±3.5 MHz



Smith Chart

VSWR

