

- 115.00 MHz IF SAW Filter / 15.87 MHz Bandwidth
- Revision 0: 19. Nov. 2009


## Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-5	-	70
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	D1			
Length x Width	mm <sup>2</sup>	-	20.0 x 9.8	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	115.0	-
Insertion Loss at Fo	dB	-	21.5	23.0
Group Delay Variation at Fo ± 7.47 MHz	nsec	-	55	100
Absolute Delay at Fo	usec	-	2.22	-
Passband Ripple Variation at Fo ± 7.47MHz	dB	-	0.52	1.00
Bandwidth at -1dB	MHz	15.70	15.87	-
Bandwidth at -3dB	MHz	-	16.21	-
Bandwidth at -40dB	MHz	-	17.61	17.75
Ultimate Rejection	dB	50	53	-
Temperature Coefficient	ppm/°C	-	-72	-

**Notes :** (1) With Matching Network (Ref. Testing Environment Circuit as shown below).  
Those impedances could be modified with different impedance values and/or structures, if necessary.


## Package Dimensions

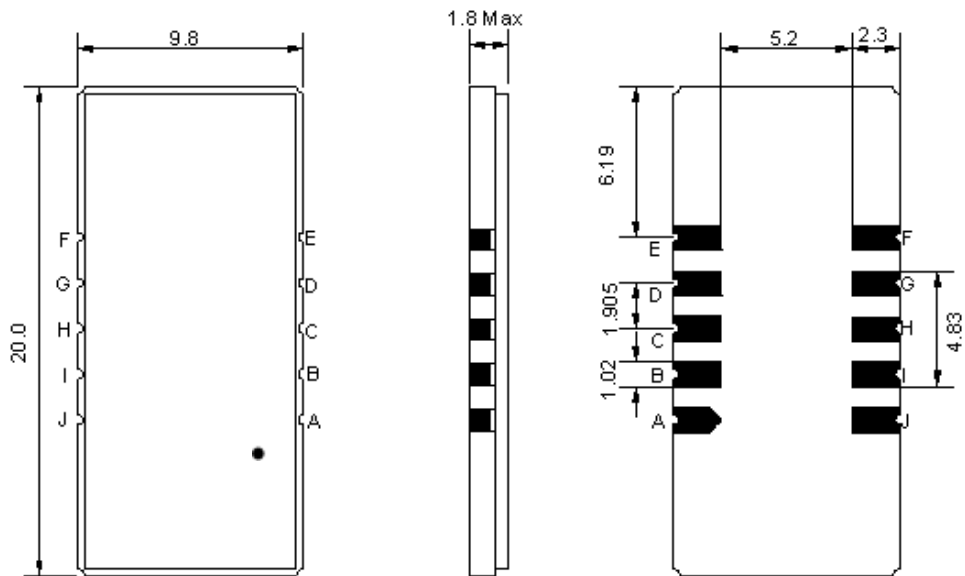

- ① **TRANSKO:** Brand
- ② **TA11515B:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I	Ground
J	Input
E	Output

## Testing Environment

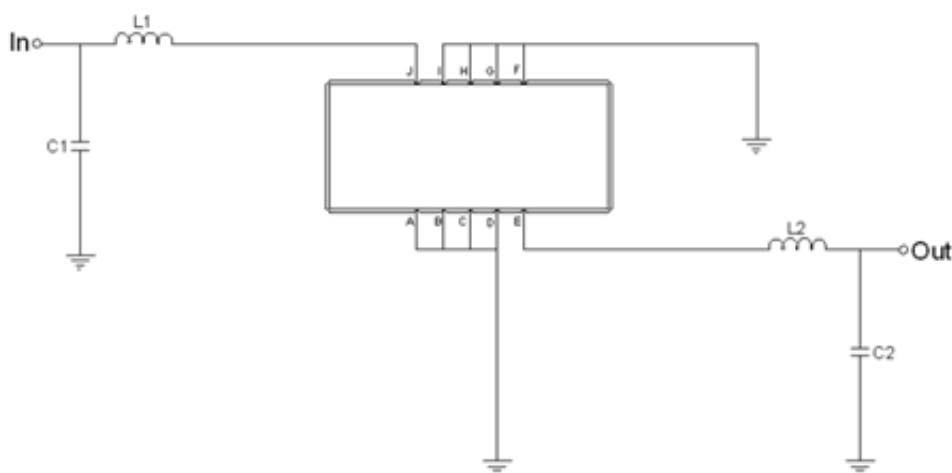



Test Fixture & Values	
<b>Input</b>	L1 = 56 nH, C1 = 15 pF
<b>Output</b>	L2 = 56 nH, C2 = 20 pF
<b>Source/Load Impedance</b>	50 Ω

## Frequency Characteristics

**Frequency Response**



**Bandwidth at -1.0 dB**

**Bandwidth at -3.0 dB**

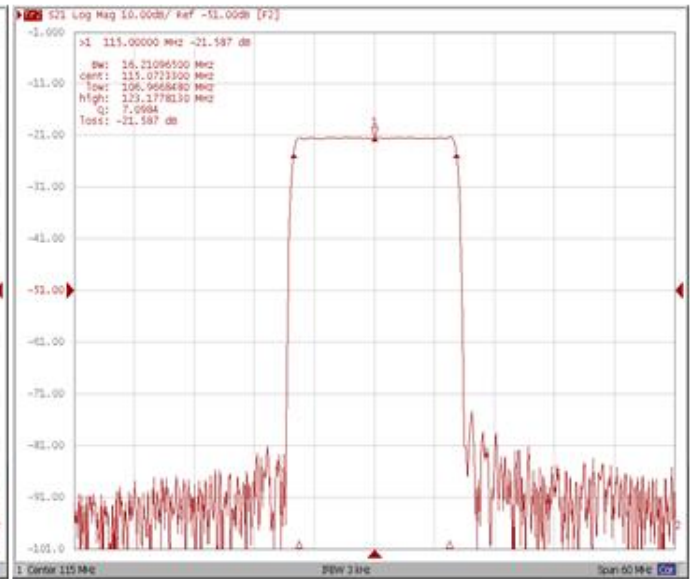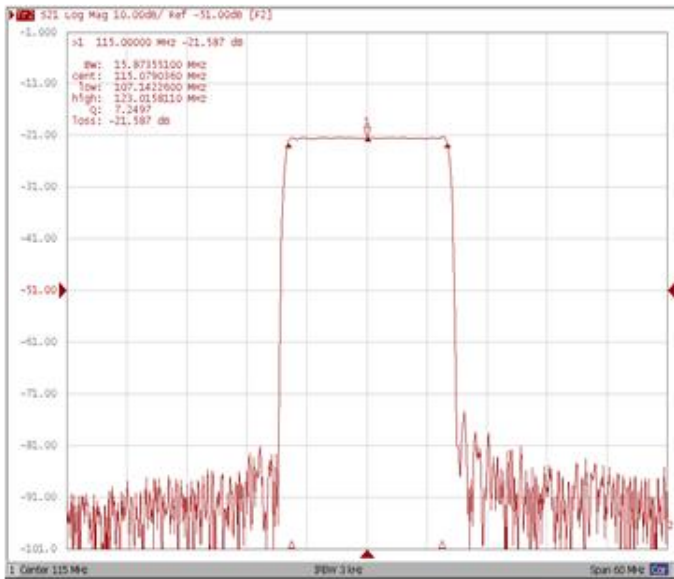

**Bandwidth at -40.0 dB**



**Wide-Band**

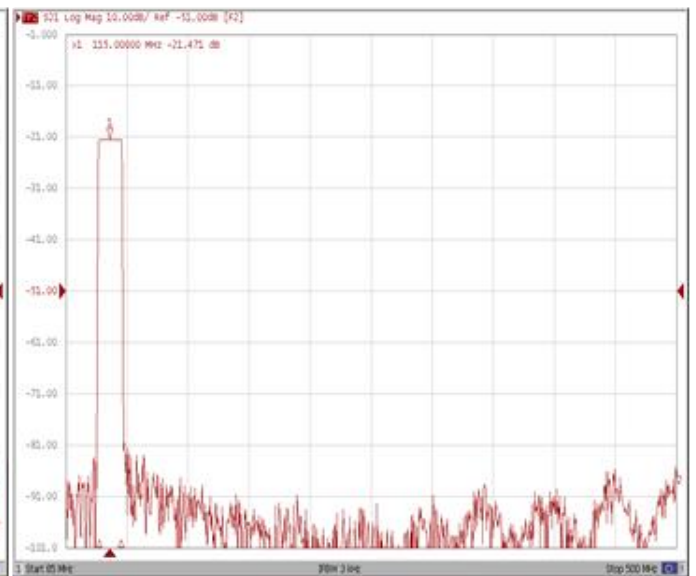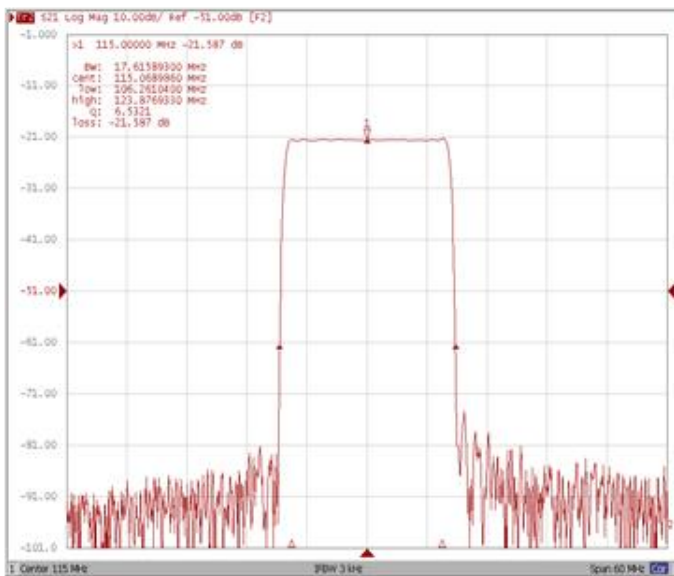

## Frequency Response

**Ripple Variation Fo±7.47 MHz**

**Group Delay Variation Fo±7.47 MHz**

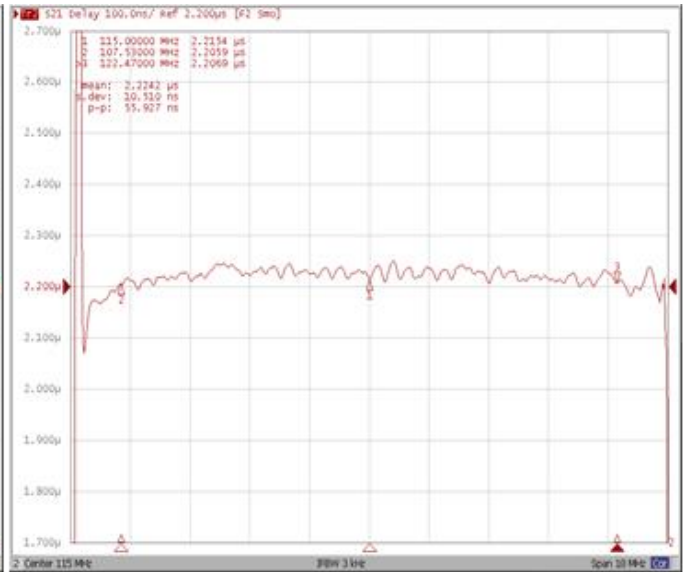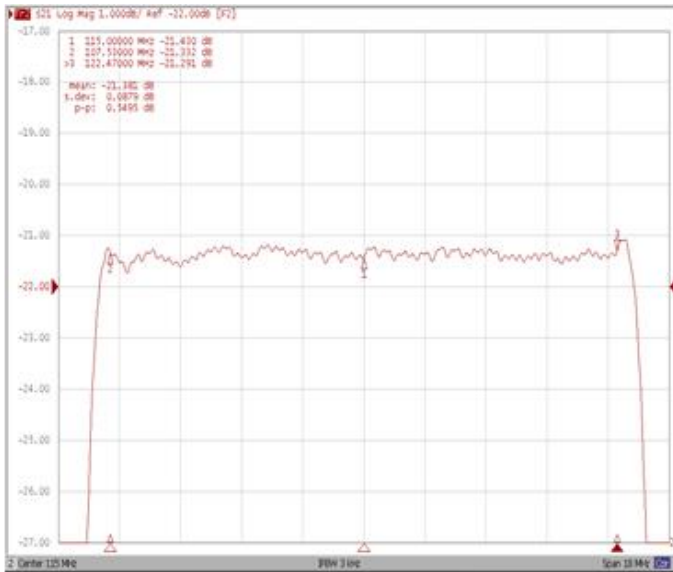

**Smith Chart**

**VSWR**

