

- 143.0 MHz IF SAW Filter / 9.80 MHz Bandwidth
- Revision 0: 27. Jul. 2011


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-30	-	80
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	D1			
Length x Width	mm ²	-	20.0 x 9.8	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	143.0	-
Insertion Loss at Fo	dB	-	24.80	27.0
Group Delay Variation (Fo±4.42MHz)	nsec	-	30	70
Absolute Delay at Fo	usec	-	3.0	3.15
Passband Ripple Variation(Fo±4.42MHz)	dB	-	0.4	1.0
Bandwidth at -1dB	MHz	9.60	9.80	-
Bandwidth at -3dB	MHz	-	10.11	-
Bandwidth at -40dB	MHz	-	11.40	11.60
Out Band Rejection (Fo±5.0MHz)	dB	50	55	-
Temperature Coefficient	ppm/°C	-	-20	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

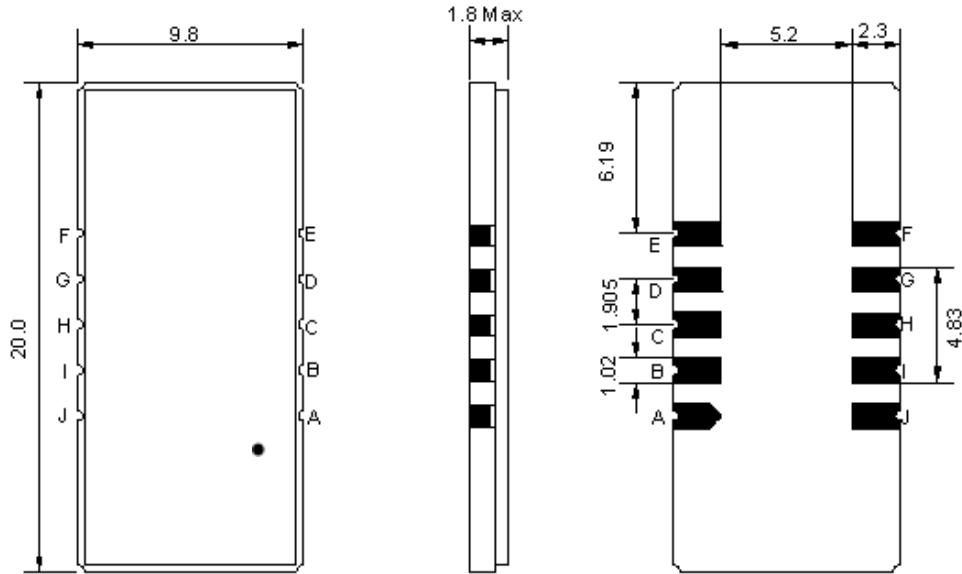

- ① **TRANSKO:** Brand
- ② **TA14309A:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I	Ground
J	Input
E	Output

Testing Environment

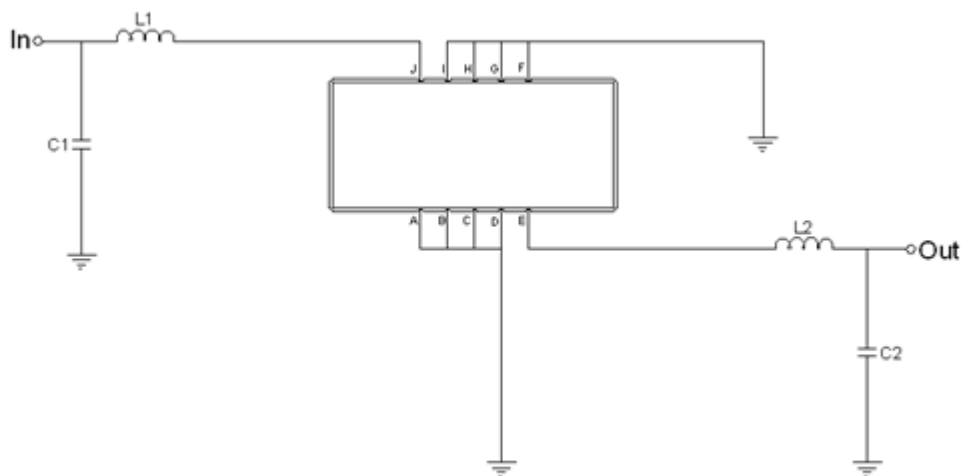



Test Fixture & Values	
Input	L1 = 47 nH, C1 = 36 pF
Output	L2 = 39 nH, C2 = 36 pF
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -3.0 dB

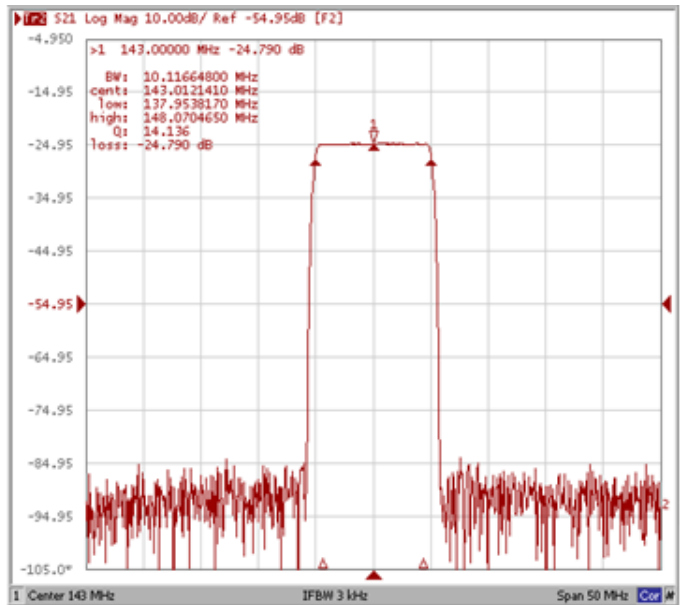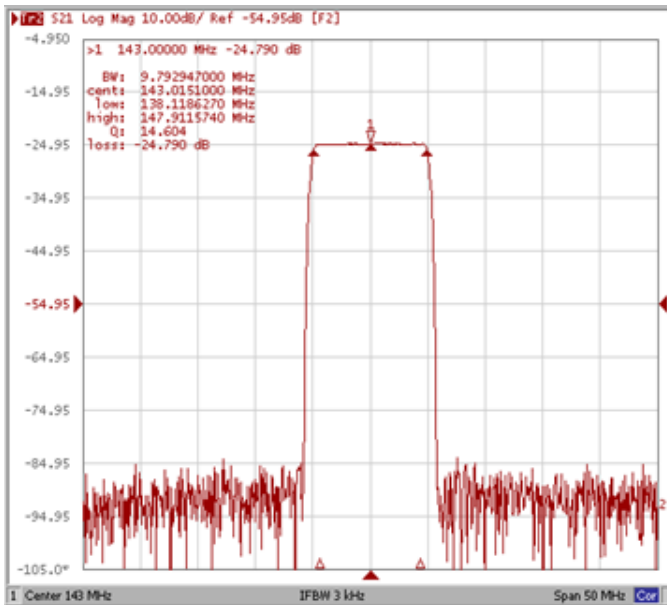


Bandwidth at -40.0 dB

Out Band Rejection Fo±5.0MHz

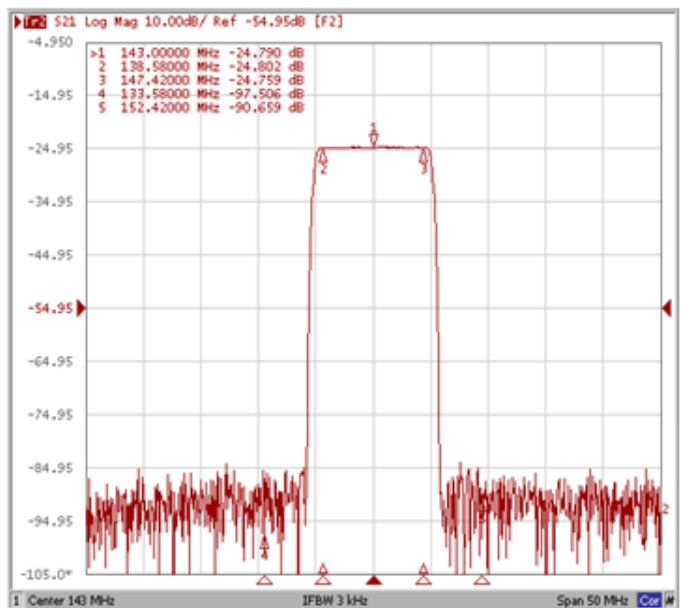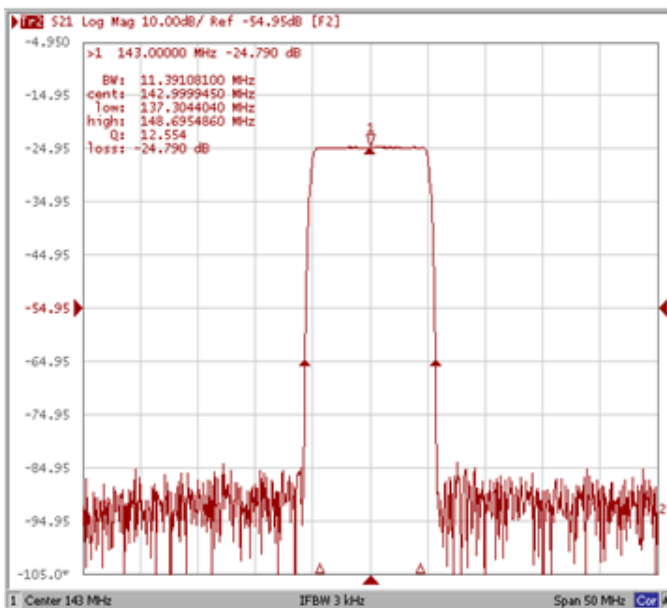


Frequency Response


Ripple Variation Fo±4.42MHz

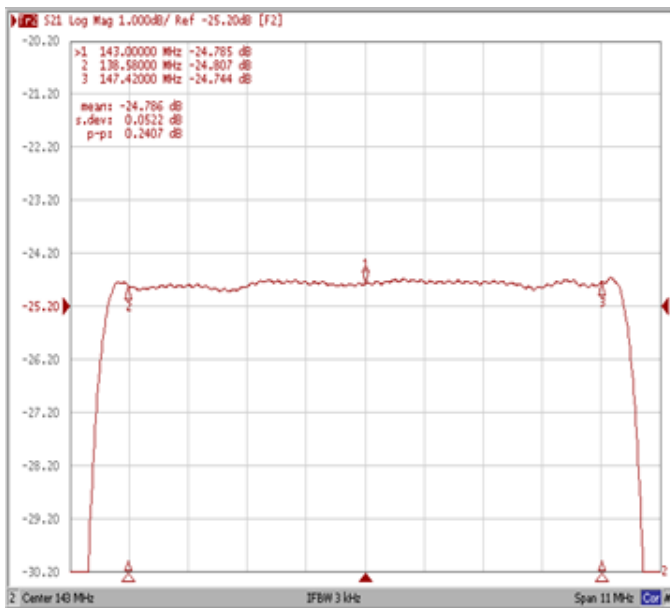

Group Delay Variation Fo±4.42MHz

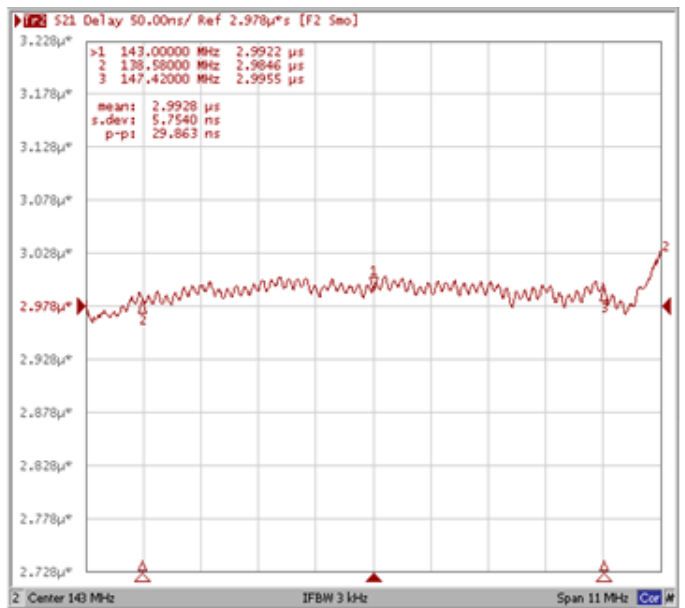

Smith Chart

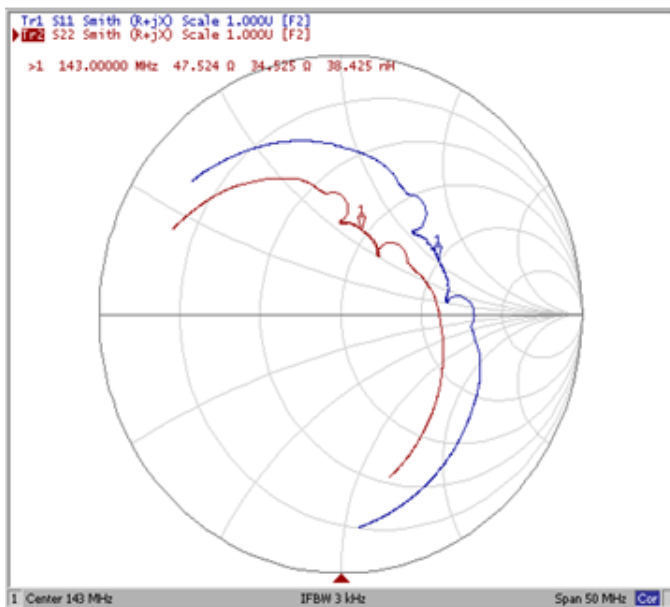

VSWR

