

- 255.00 MHz IF SAW Filter / 29.59 MHz Bandwidth
- Revision 0: 23. Feb. 2010


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-	25	-
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	255.0	-
Insertion Loss at Fo	dB	-	30.2	33.0
Group Delay Variation at Fo ± 14.32 MHz	nsec	-	32	70
Absolute Delay at Fo	usec	-	2.08	-
Passband Ripple Variation at Fo ± 14.32 MHz	dB	-	0.6	1.1
Bandwidth at -1dB	MHz	29.05	29.59	-
Bandwidth at -3dB	MHz	-	30.04	-
Bandwidth at -40dB	MHz	-	31.96	32.05
Ultimate Rejection	dB	47	52	-
Temperature Coefficient	ppm/°C	-	-72	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

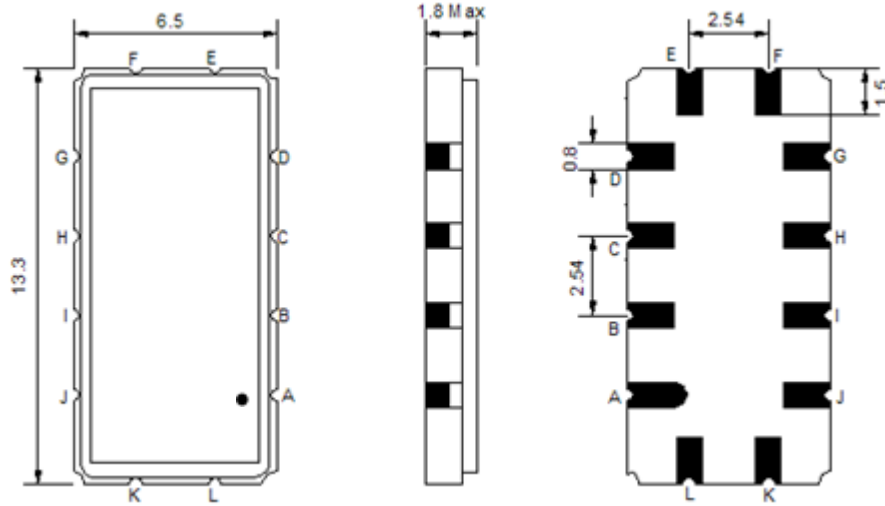

- ① **TRANSKO:** Brand
- ② **TA25529D:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

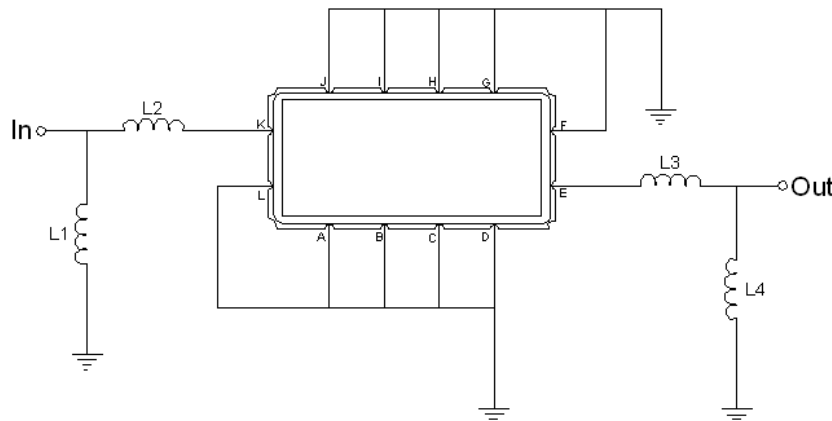



Test Fixture & Values	
Input	L1 = 5.6 nH, L2 = 2.2 nH
Output	L3 = 2.2 nH, L4 = 5.6 nH
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -3.0 dB

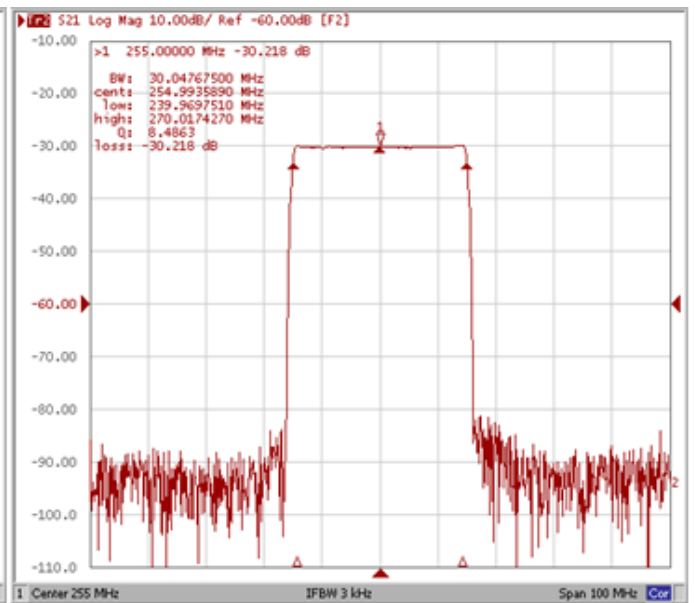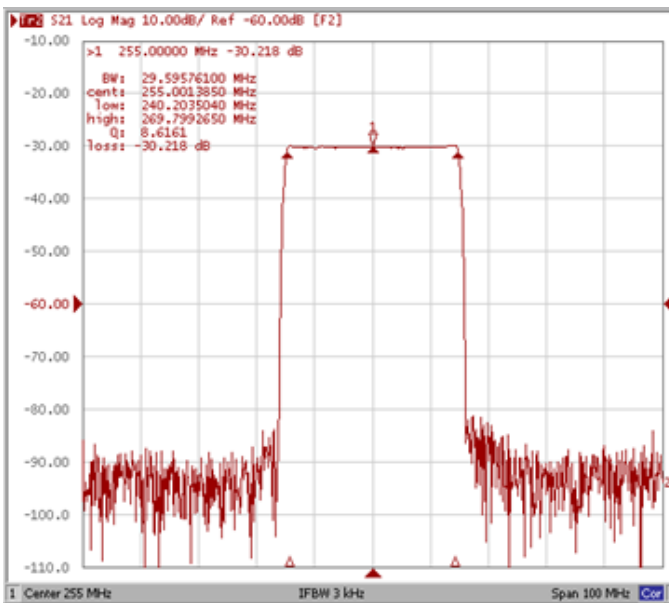

Bandwidth at -40.0 dB



Bandwidth at -50.0 dB

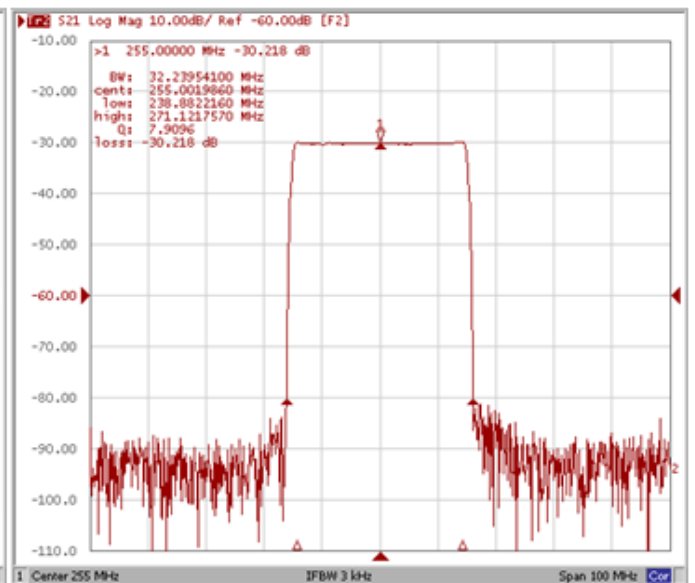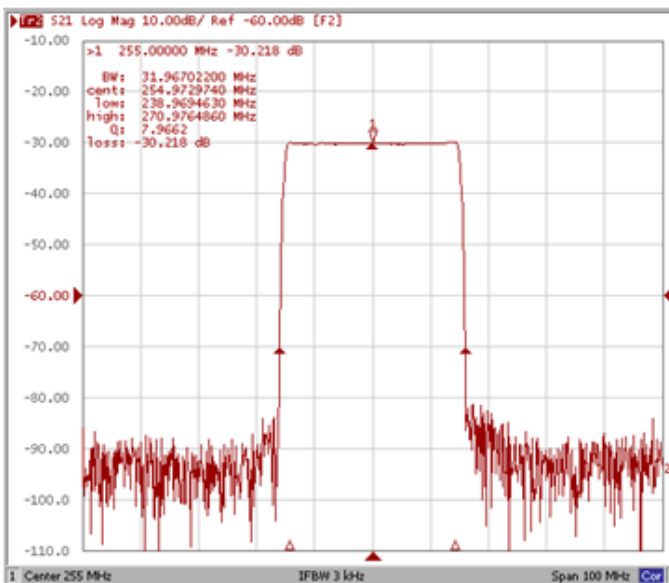

Frequency Response

Ripple Variation Fo±14.32 MHz

Group Delay Variation Fo±14.32 MHz

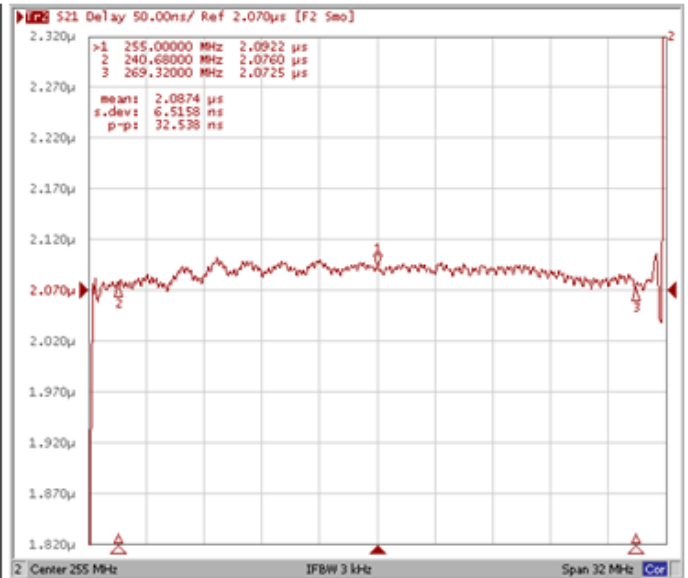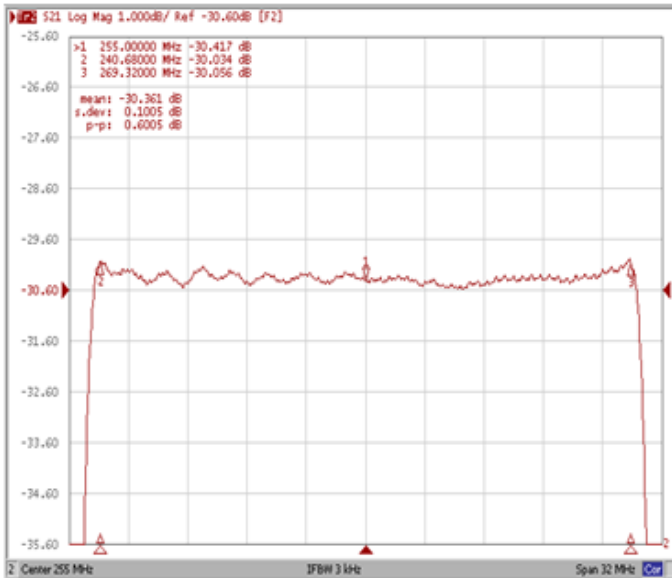

Smith Chart

VSWR

