

- 160.00 MHz IF SAW Filter / 21.35 MHz Bandwidth
- Revision 0: 20 Feb. 2013


## Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-	25	-
Storage Temperature Range	°C	-45	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	S90			
Length x Width	mm <sup>2</sup>	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	160.00	-
Insertion Loss at Fo	dB	-	12.00	15.00
Group Delay Variation at Fo ± 9.5 MHz	nsec	-	40	100
Absolute Delay at Fo	usec	-	0.87	1.20
Passband Ripple Variation at Fo ± 9.5 MHz	dB <sub>p-p</sub>	-	0.5	1.0
Bandwidth at -1dB	MHz	21.00	21.35	-
Bandwidth at -3dB	MHz	-	22.15	-
Bandwidth at -40dB	MHz	-	25.70	26.10
Ultimate Rejection	dB	37	40	-
Relative Attenuation:				
Fo - 13.0 MHz	dB	40	47	-
Fo + 13.0 MHz	dB	20	31	-
Temperature Coefficient	ppm/°C	-	-86	-

**Notes :** (1) With Matching Network (Ref. Testing Environment Circuit as shown below).  
Those impedances could be modified with different impedance values and/or structures, if necessary.


## Package Dimensions

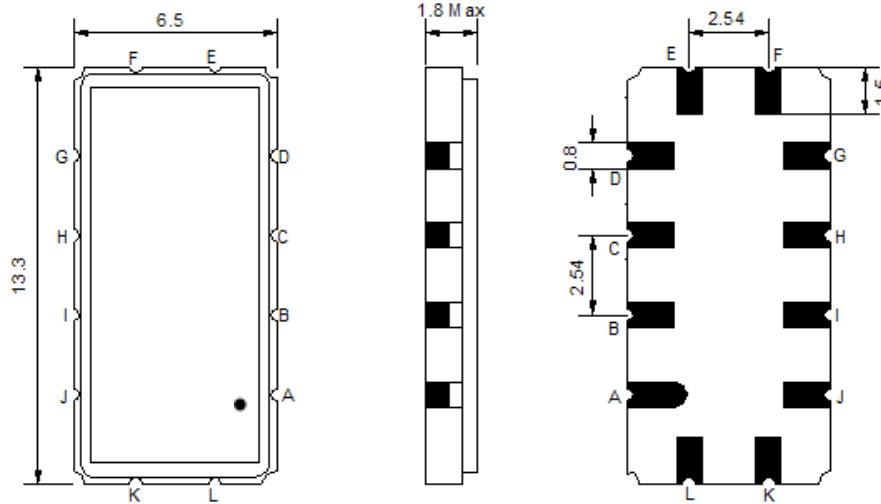

- ① **TRANSKO:** Brand
- ② **TF-016002:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

## Testing Environment

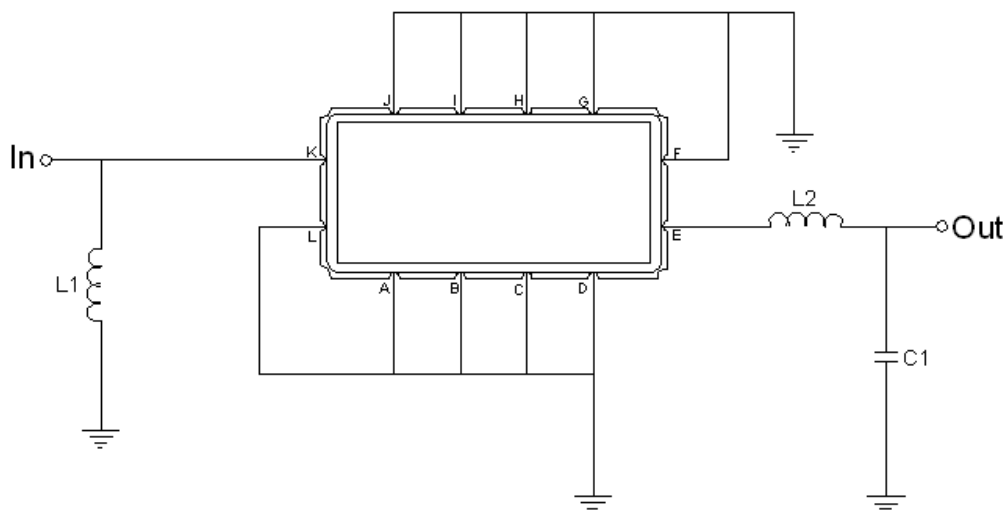


Test Fixture & Values	
Input	L1 = 27nH
Output	L2 = 56nH, C1 = 30pF
Source/Load Impedance	50 Ω

## Frequency Characteristics


### Frequency Response

Operating Temperature: +25°C


#### Bandwidth at -1.0 dB

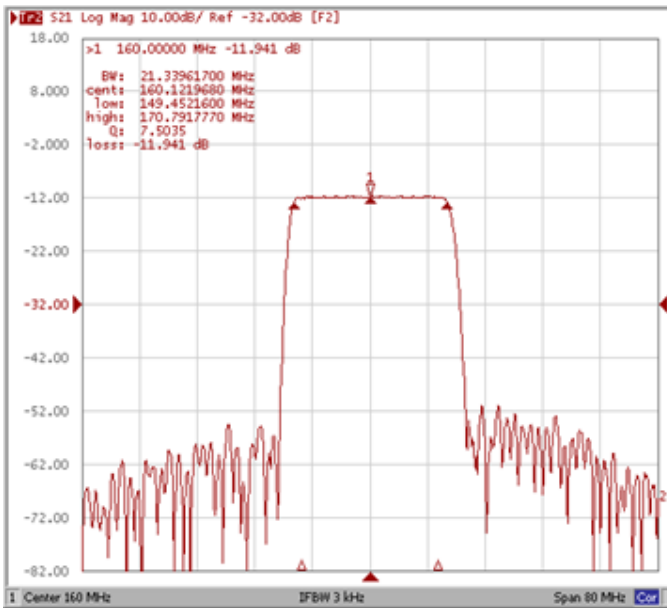


#### Bandwidth at -3.0 dB

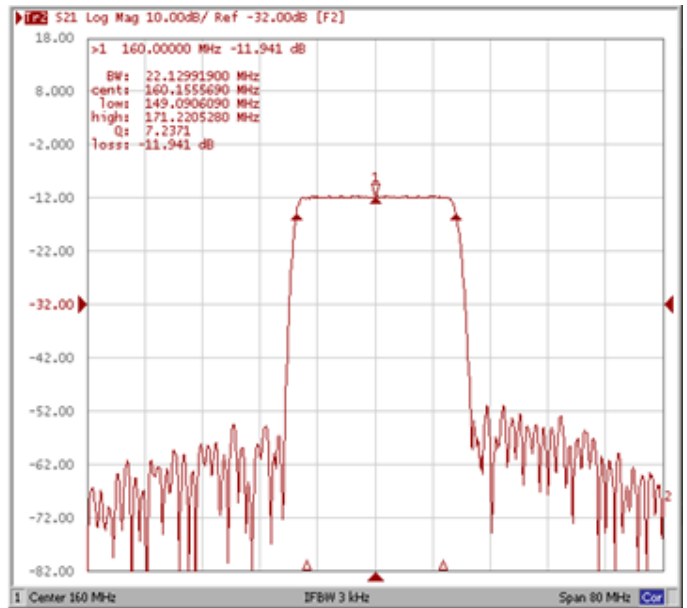

#### Bandwidth at -40.0 dB

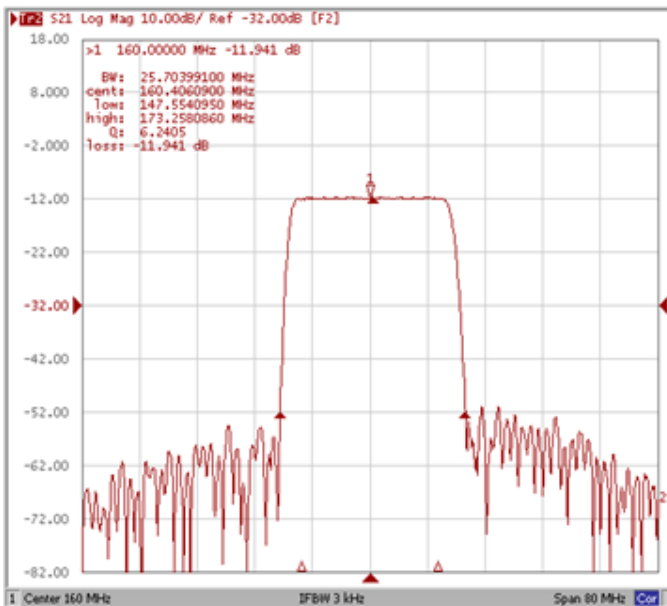



#### Relative Attenuation Fo ± 13.0 MHz

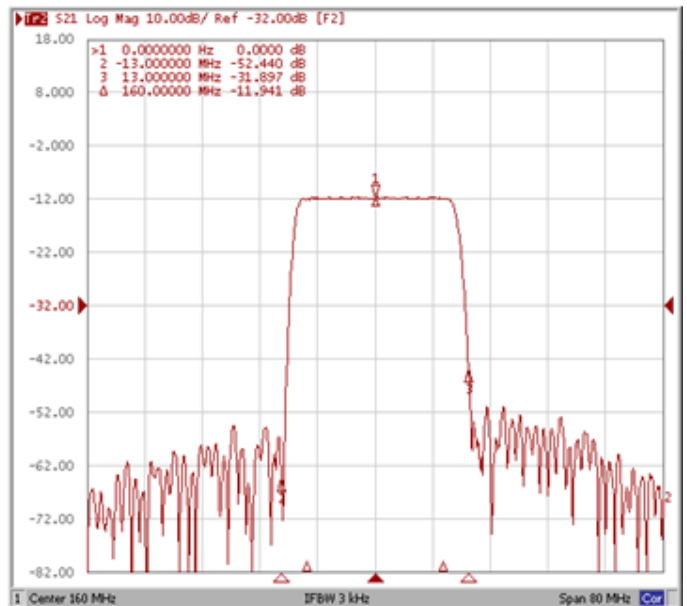

## Frequency Response

### Ripple Variation $F_0 \pm 9.5\text{MHz}$

### Group Delay Variation $F_0 \pm 9.5\text{MHz}$

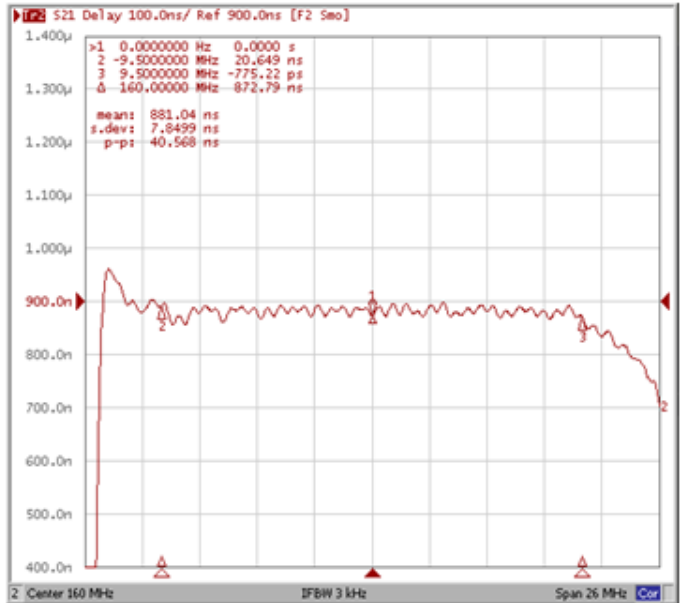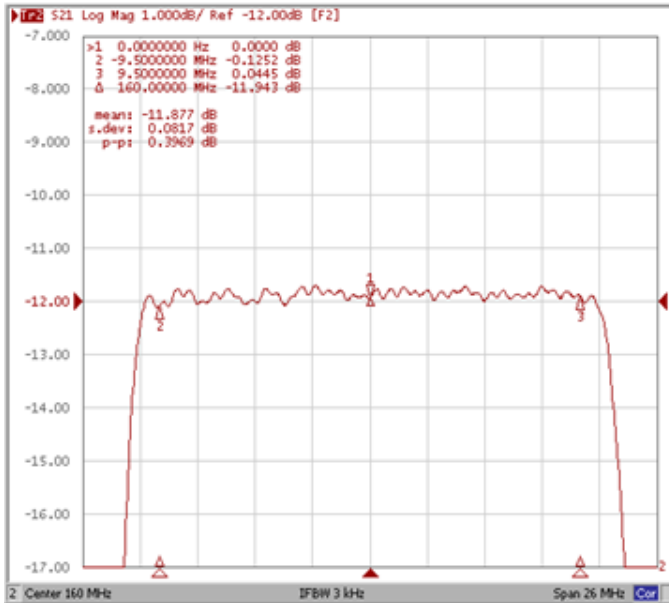

### Smith Chart

### VSWR

