

- 60.00 MHz IF SAW Filter / 10.20 MHz Bandwidth
- Revision 0: 29 Aug. 2008

## Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-20	-	70
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	V			
Length x Width	mm <sup>2</sup>	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	60.0	-
Insertion Loss at Fo	dB	-	14.7	17.00
Amplitude Ripple within fo ±4.60 MHz	dB <sub>p-p</sub>	-	0.45	0.80
Group Delay Variation within fo ±4.60 MHz	nsec	-	40	80
Absolute Delay at Fo	µsec	-	1.66	-
Bandwidth at -1.0 dB	MHz	10.00	10.20	-
Bandwidth at -3.0 dB	MHz	-	10.67	-
Bandwidth at -25.0 dB	MHz	-	12.25	-
Bandwidth at -40.0 dB	MHz	-	12.80	13.00
Relative Attenuation				
Lower Sidelobe	dB	40	50	-
Upper Sidelobe	dB	40	50	-
Temperature Coefficient	ppm/°C	-	-86	-

**Notes :** (1) With Matching Network (Ref. Testing Environment Circuit as shown below).  
Those impedances could be modified with different impedance values and/or structures, if necessary.


## Package Dimensions



- ① **TRANSKO:** Brand
- ② **TL06010B:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

## Testing Environment

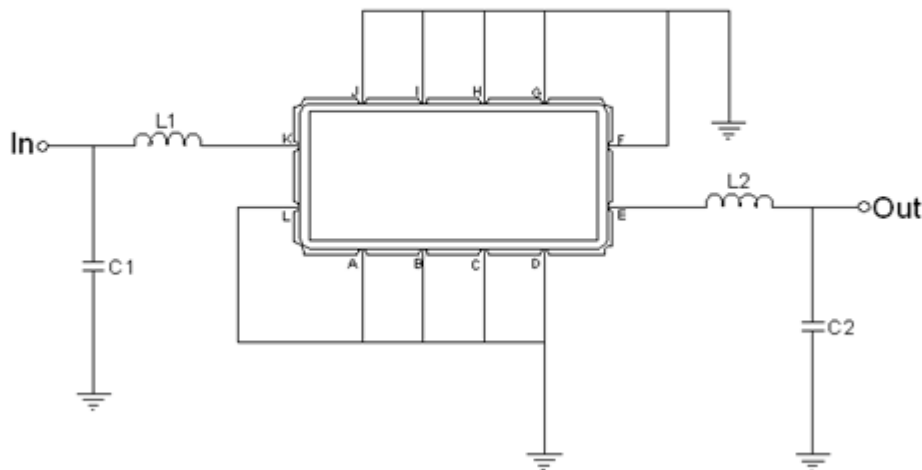


Test Fixture & Values	
Input	L1=120nH, C1=91pF
Output	L2=100nH, C2=43pF
Source/Load Impedance	50 Ω


## Frequency Characteristics

### Frequency Response


**Bandwidth at -1.0 dB**

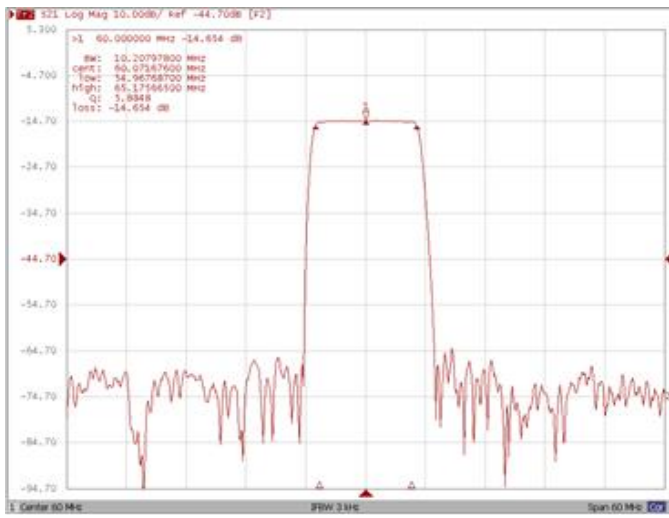


**Bandwidth at -3.0 dB**

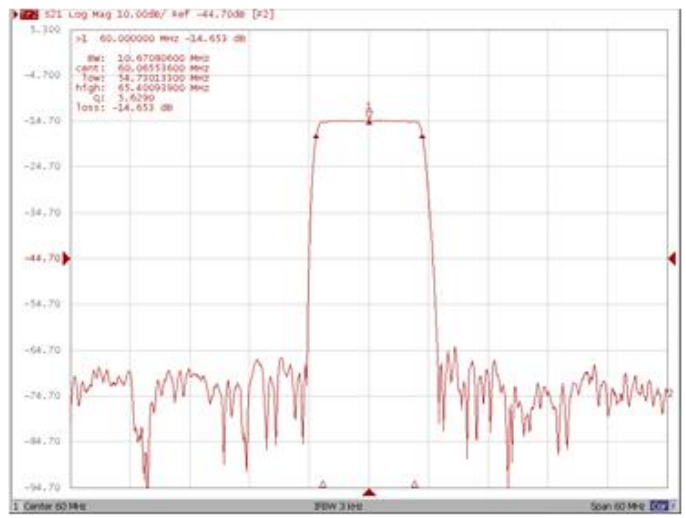

**Bandwidth at -25.0 dB**

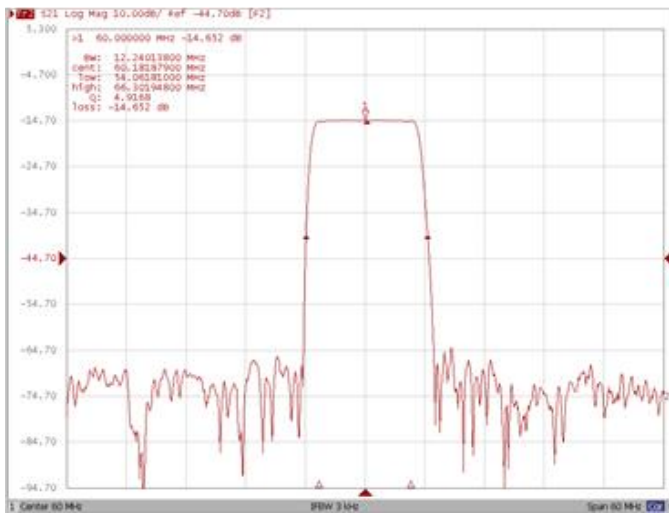


**Bandwidth at -40.0 dB**

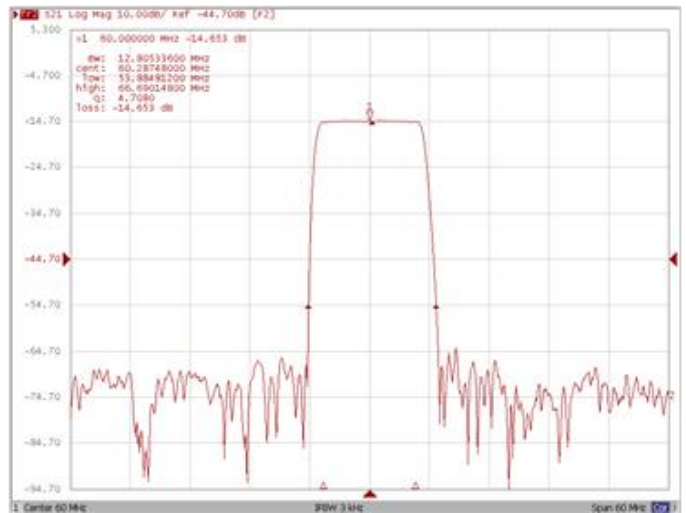


## Frequency Response


**Ripple Variation Fo±4.60MHz**

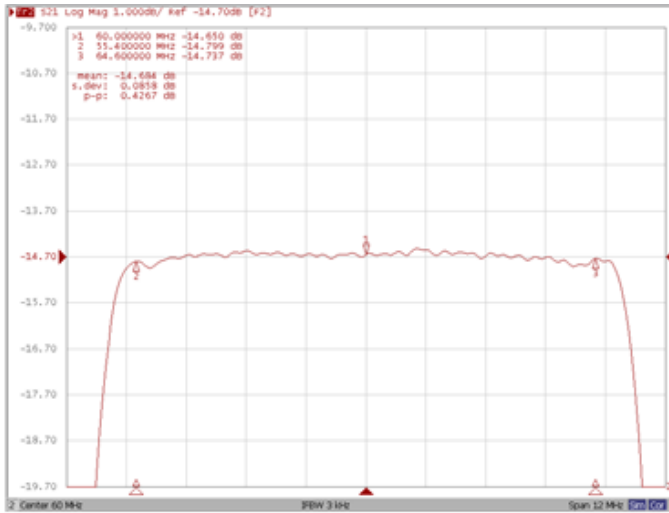

**Group Delay Variation Fo±4.60MHz**

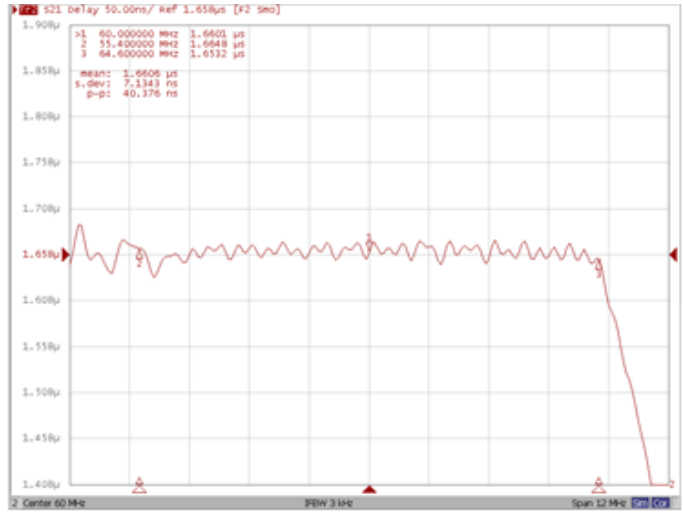

**Smith Chart**

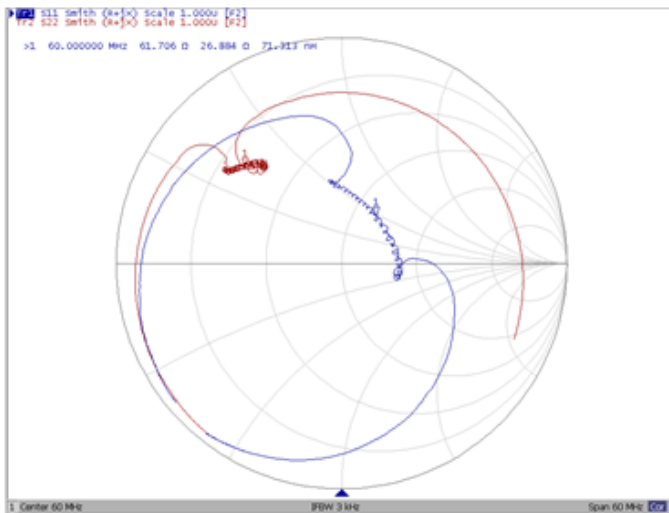

**VSWR**

