

- 300.00 MHz IF SAW Filter / 3.66 MHz Bandwidth
- Revision 1: 29 Oct. 2007


## Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-30	-	80
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	V			
Length x Width	mm <sup>2</sup>	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	300.0	-
Insertion Loss at Fo	dB	-	17.5	19.5
Temperature Coefficient	ppm/°C	-	-0.03	-
Amplitude Ripple Variation	dB <sub>p-p</sub>	-	1.0	1.5
Group Delay Variation	nsec	-	150	200
Absolute Delay at Fo	μsec	-	0.509	1.2
Bandwidth at -1.0 dB	MHz	2.0	2.54	-
Bandwidth at -3.0 dB	MHz	3.0	3.66	-
Bandwidth at -40.0 dB	MHz	-	9.74	11.0
Relative Attenuation:				
Lower sidelobe	dB	50	55	-
Upper sidelobe	dB	50	55	-
Ambient Temperature	°C	-	25	-


**Notes :** (1) With Matching Network (Ref. Testing Environment Circuit as shown below).  
Those impedances could be modified with different impedance values and/or structures, if necessary.

## Package Dimensions

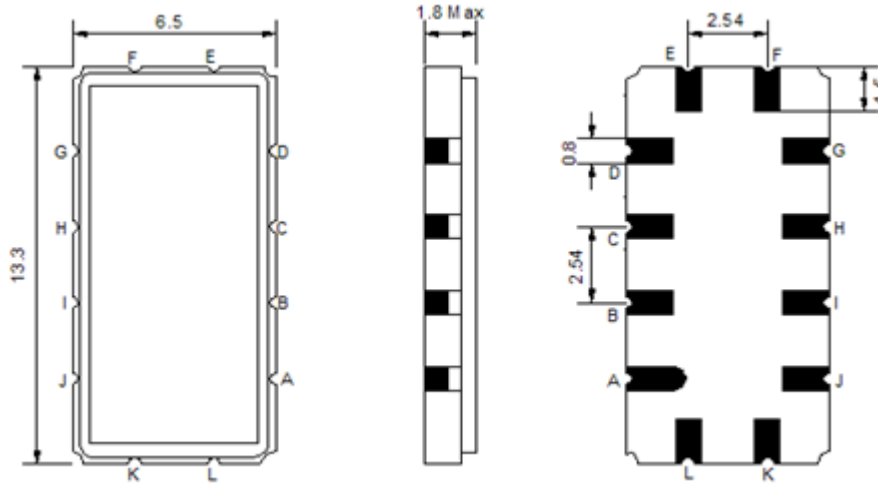

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output


## Testing Environment

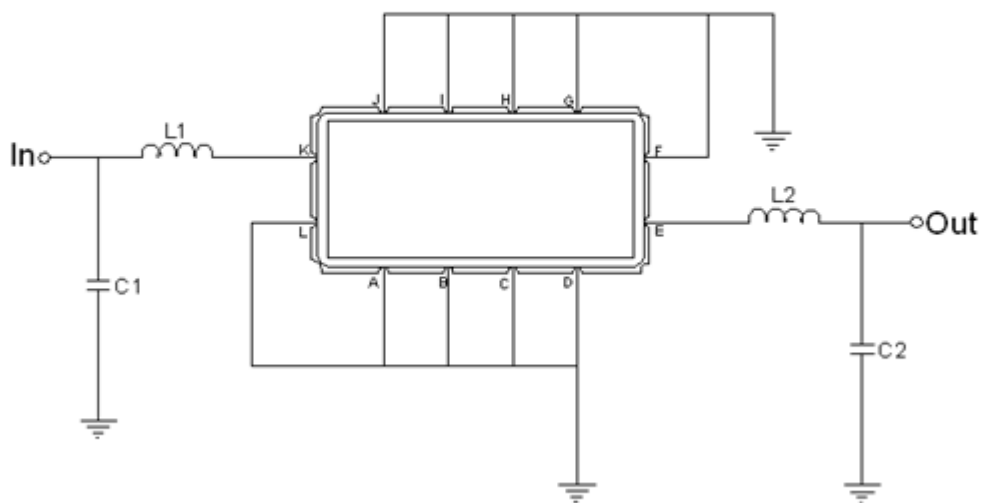

Test Fixture & Values	
Input	L1=55nH, C1=23pF
Output	L2=54nH, C2=23.3pF
Source/Load Impedance	50 $\Omega$

## Frequency Characteristics

### Frequency Response

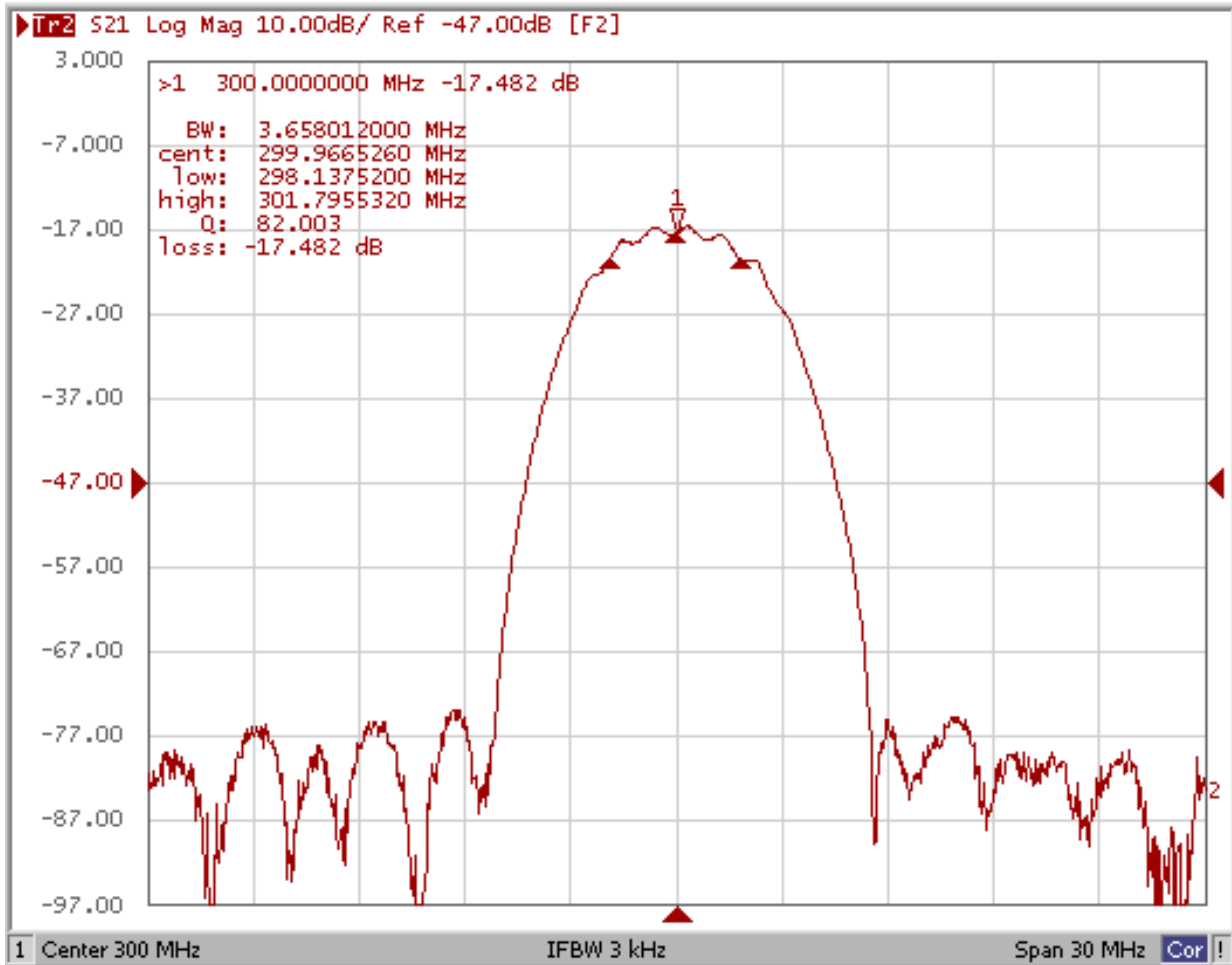

Smith Chart