

- Wireless, RF SAW Filter
- Revision 0: March 2008


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-32	-	+85
Storage Temperature Range	°C	-50	-	+85
Maximum DC Voltage	V	-	-	5
Maximum Input Power	dBm	-	-	20
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	M			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	2070.0	-
Insertion Loss within 2068.0 ~ 2072.0 MHz	dB	-	2.1	4.0
Attenuation:				
1940.0 ~ 1960.0 MHz	dB	20	32	-
2130.0 ~ 2150.0 MHz	dB	40	52	-

Notes: (1) No Matching Network (Ref. Testing Environment Circuit as shown below).


Package Dimensions

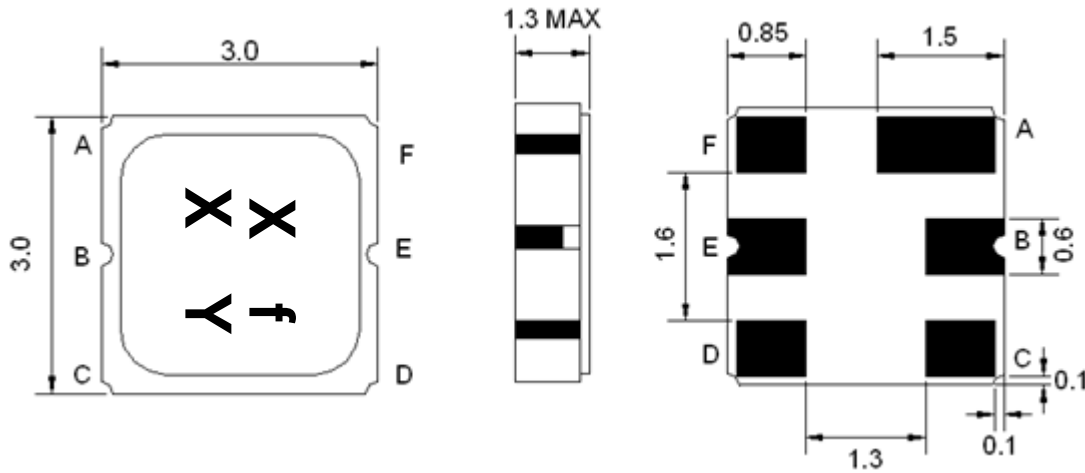

Marking Descriptions	
X	Wireless Application
f	Series Number
X	Date Code (Year)
Y	Date Code (Month)

Pin Description	
A, C, D, F	Ground
E	In
B	Out

Testing Environment

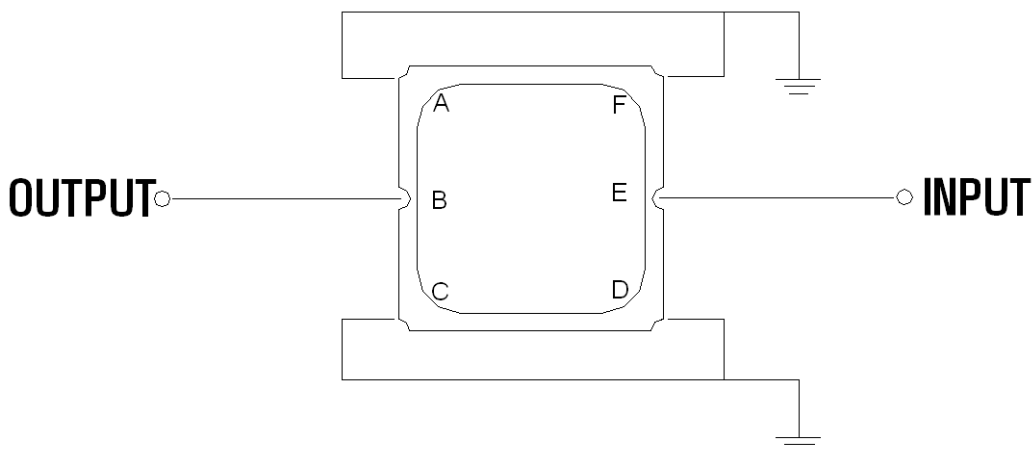

Source & Load Impedance: 50 Ω

Frequency Characteristics

Frequency Response

