

- Wireless, RF SAW Filter
- Revision 0: September 2007


## Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	3
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	M			
Length x Width	mm <sup>2</sup>	-	3.0 x 3.0	-
Height	mm	-	-	1.3

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	2085.0	-
Insertion Loss within 2082.5 ~ 2087.5 MHz	dB	-	1.4	2.5
Amplitude Ripple within 2082.5 ~ 2087.5 MHz	dB <sub>p-p</sub>	-	0.1	0.5
Return Loss within 2082.5 ~ 2087.5 MHz	dB	18	25	-
<b>Attenuation:</b>				
1985.0 MHz	dB	35	43	-
2210.0 MHz	dB	30	33	-

**Notes:** (1) No Matching Network (Ref. Testing Environment Circuit as shown below).

## Package Dimensions

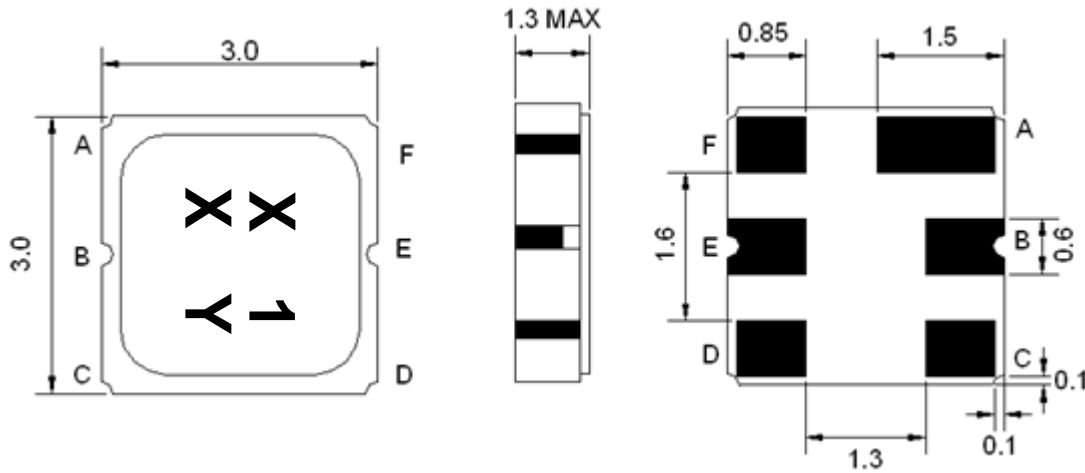

Marking Descriptions	
X	Wireless Application
1	Series Number
X	Date Code (Year)
Y	Date Code (Month)

Pin Description	
A, C, D, F	Ground
E	In
B	Out


## Testing Environment



Source & Load Impedance: 50  $\Omega$

## Frequency Characteristics

Frequency Response

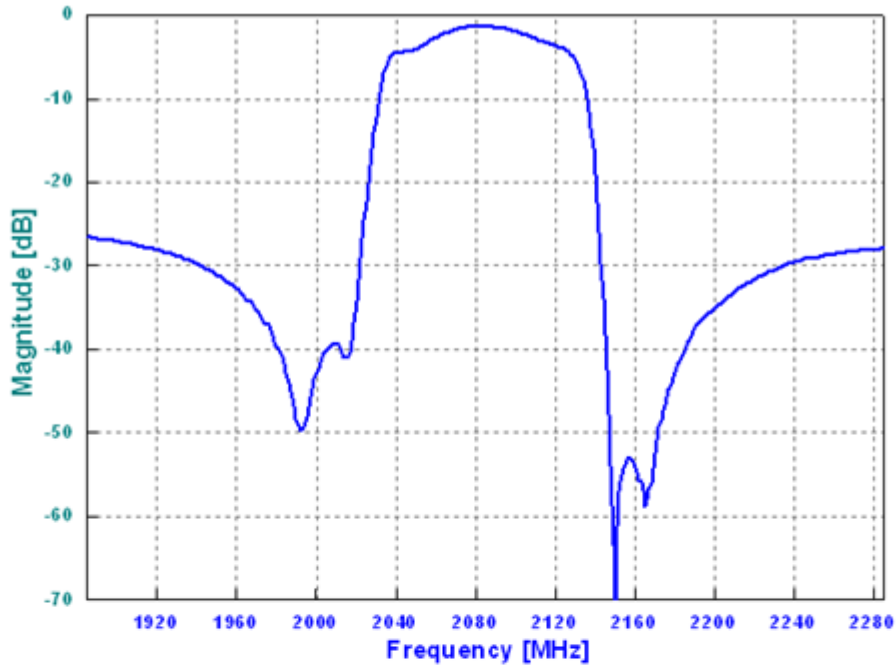

Return Loss

