

TUNING FORK CYLINDRICAL CRYSTAL (1.5 x 5.1mm)

FEATURES:


- MINIATURE TUNING FORK CRYSTAL
- EXCELLENT HEAT RESISTANCE
- WATCH FREQUENCY



■ SPECIFICATION


FREQUENCY RANGE	32.768kHz
FREQUENCY TOLERANCE @ 25°C	±20ppm
TEMPERATURE COEFFICIENT	-0.040ppm / °C ² max.
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C
STORAGE TEMPERATURE RANGE	-40°C ~ 85°C
TURN OVER TEMPERATURE	25°C ± 5°C
LOAD CAPACITANCE	STD: 12.5pF
SHUNT CAPACITANCE	2.0pF max.
MOTIONAL CAPACITANCE	0.003pF typ.
CAPACITANCE RATIO	460 typ.
EQUIVALENT SERIES RESISTANCE	60kΩ max.
INSULATION RESISTANCE	500MΩ min. @ 100V _{DC} ±15V _{DC}
DRIVE LEVEL	1.0μW max.
AGING @ 25°C ± 3°C	±5.0ppm / 1 st year max.

■ PACKAGE DIMENSIONS

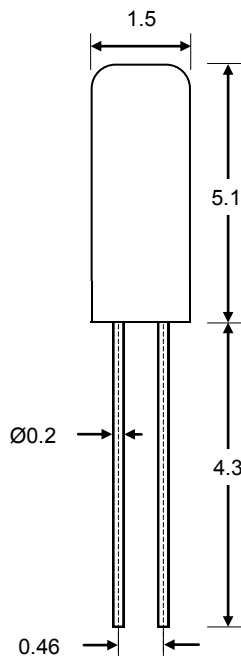


Unit:mm

■ TEMPERATURE COEFFICIENT

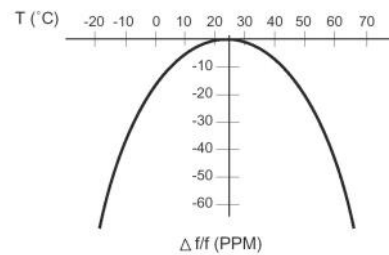

■ PART NUMBERING GUIDE

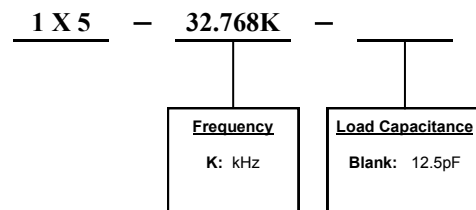

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.