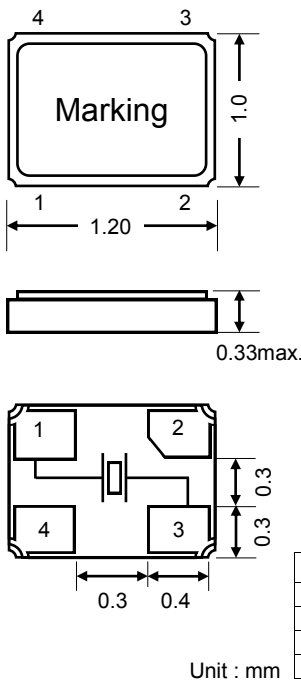

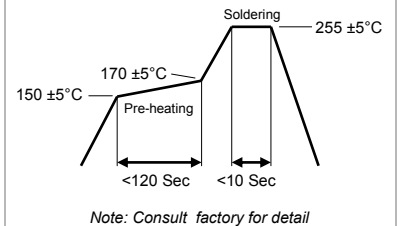
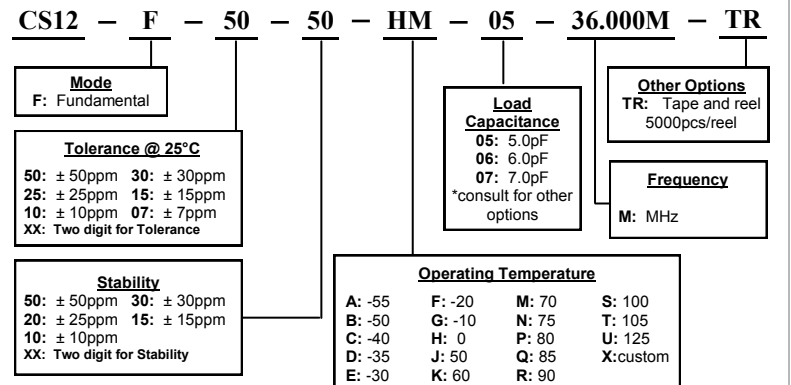


ULTRA MINIATURE CERAMIC SMD CRYSTAL (1.2 x 1.0 x 0.33mm)
FEATURES:

- THE WORLD'S SMALLEST QUARTZ CRYSTAL UNIT
- AEC-Q200 COMPLIANT SPEC AVAILABLE UPON REQUEST
- SUITABLE FOR ROHS REFLOW


■ SPECIFICATION

FREQUENCY RANGE	36.000MHz ~ 80.000MHz
FREQUENCY TOLERANCE @ 25°C	±7ppm ~ 50ppm (See P/N guide for other options)
FREQUENCY STABILITY	±10ppm ~ 50ppm (See P/N guide for other options)
OPERATING TEMPERATURE RANGE	STD: 0°C ~ 70°C, Option: -40°C ~ 125°C (See P/N guide for other options)
STORAGE TEMPERATURE RANGE	-55°C ~ 125°C
LOAD CAPACITANCE	5pF, 6pF, 7pF (See P/N guide, other option available)
SHUNT CAPACITANCE	7.0pF max.
INSULATION RESISTANCE	500MΩ min. @ 100V _{DC} ± 15V _{DC}
DRIVE LEVEL	100μW max.
AGING @ 25°C ± 3°C	±3.0ppm / 1 st year max.
EQUIVALENT SERIES RESISTANCE	36.000MHz - 40.000MHz: 150Ω max. 40.001MHz - 48.000MHz: 80Ω max. 48.001MHz - 80.000MHz: 60Ω max.
OPERATION MODE	AT Cut, Fundamental

■ PACKAGE DIMENSIONS

■ SOLDER PATTERN

■ REFLOW PROFILE

■ PART NUMBERING GUIDE


Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.