


Power Inductor SMD (3.2 X 3.7 X 2.0 mm)

FEATURES

- Iron Powder Molding
- Shielded Construction
- Halogen Free RoHS compliant
- Low DCR
- Low acoustic noise

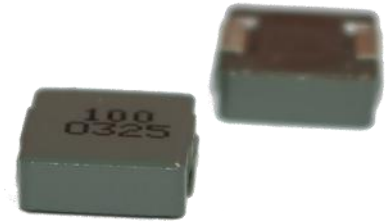


SPECIFICATION


Part No.	Inductance (μH)	DC Resistance ($\text{m}\Omega$) Max. (Typ.)	Rated DC Current (A) Typ.	
			$\Delta\text{L}/\text{L}=30\%$	$\Delta\text{T}=40^\circ\text{C}$
TMPIT03020F-R47_	0.47	23 (19.7)	9.0	7.0
TMPIT03020F-R68_	0.68	29 (25.5)	7.0	5.5
TMPIT03020F-1R0_	1.0	38 (32.0)	5.0	4.0
TMPIT03020F-1R5_	1.5	50 (42.0)	4.0	3.8
TMPIT03020F-2R2_	2.2	75 (65.0)	3.7	3.5
TMPIT03020F-3R3_	3.3	145 (125)	3.5	3.0
TMPIT03020F-4R7_	4.7	200 (172)	3.0	2.6
TMPIT03020F-5R6_	5.6	238 (205)	2.6	2.2
TMPIT03020F-6R8_	6.8	300 (260)	2.2	1.9
TMPIT03020F-8R2_	8.2	390 (340)	1.9	1.6
TMPIT03020F-100_	10	422 (366)	1.6	1.4

- Measurement frequency of Inductance value : 100KHz, 1V
- Inductance tolerance: Letter at end of part number: N = $\pm 30\%$; M = $\pm 20\%$


DIMENSION

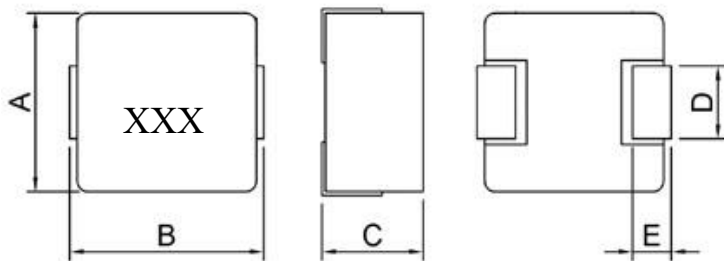







SOLDER PATTERN








SCHEMATIC




	A	B	C	D	E	G	H	I
mm	3.20 \pm 0.20	3.70 Max	2.00 Max	1.20 \pm 0.2	1.00 Ref	4.10	1.45	1.90

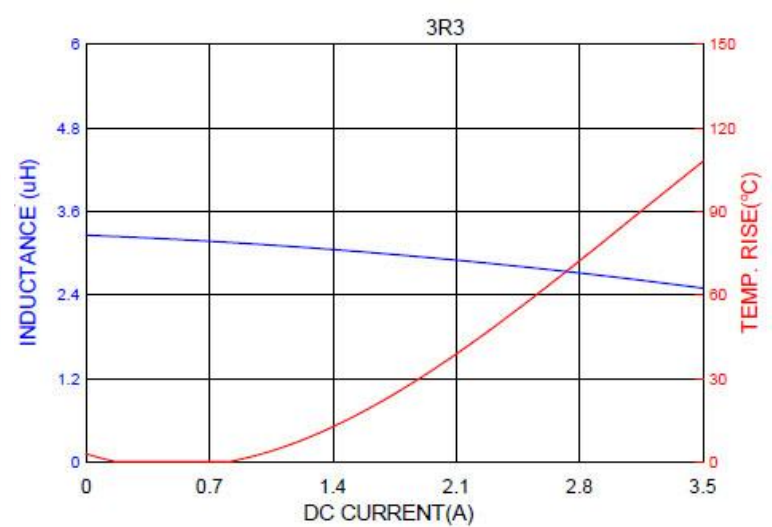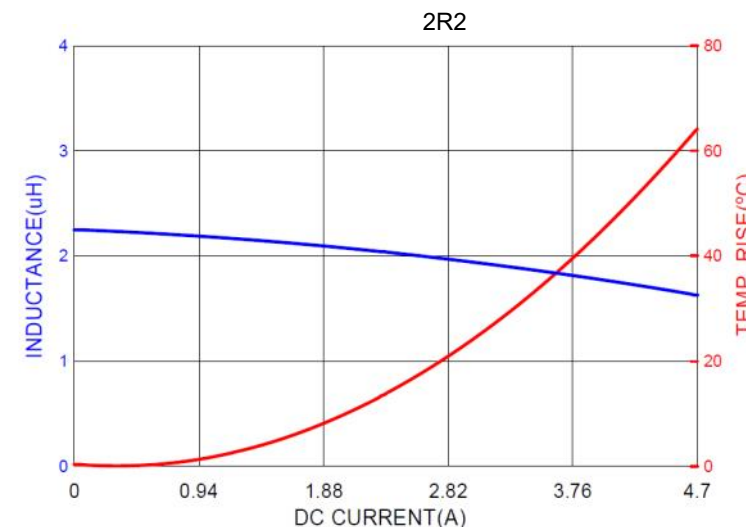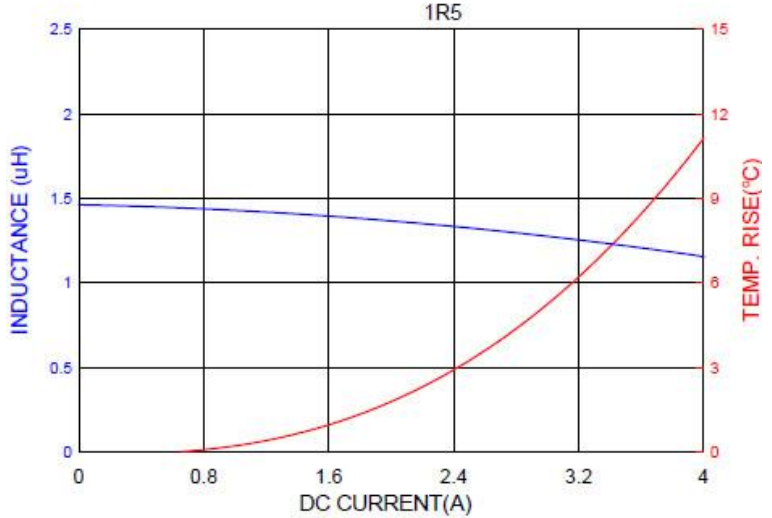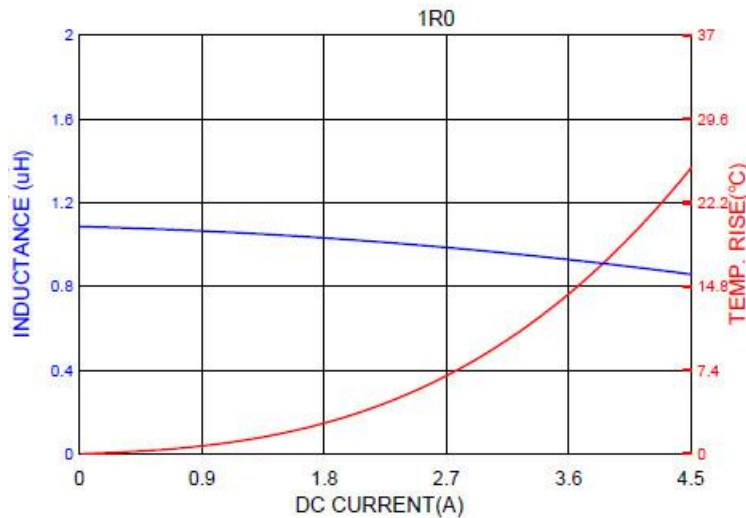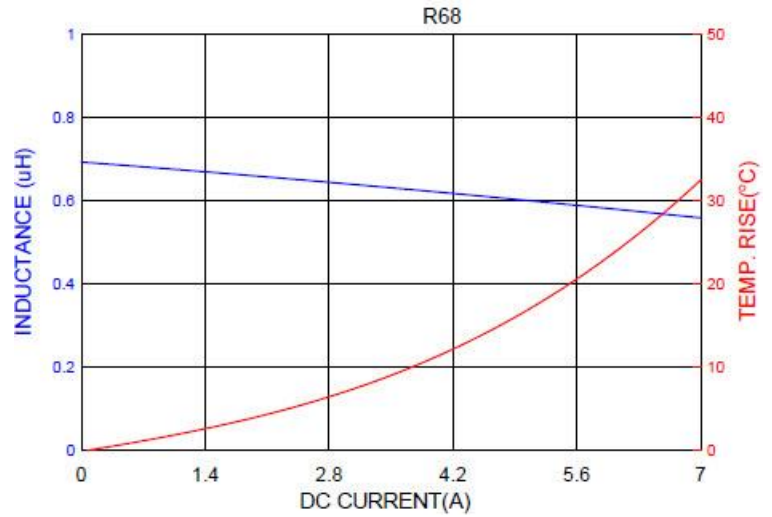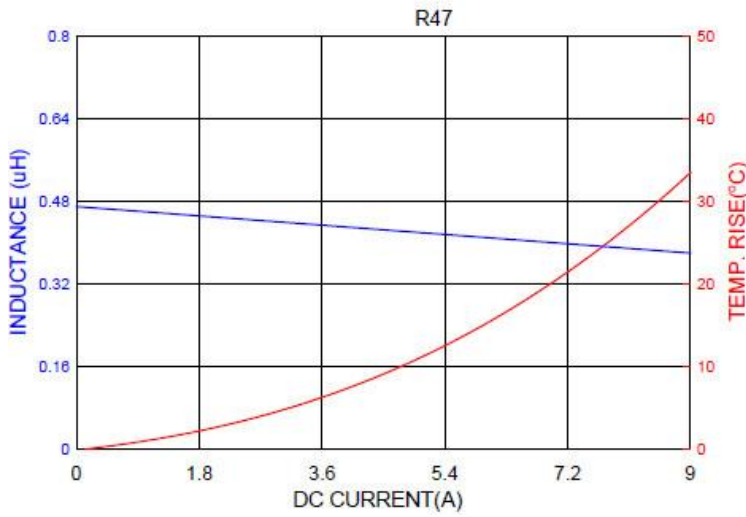


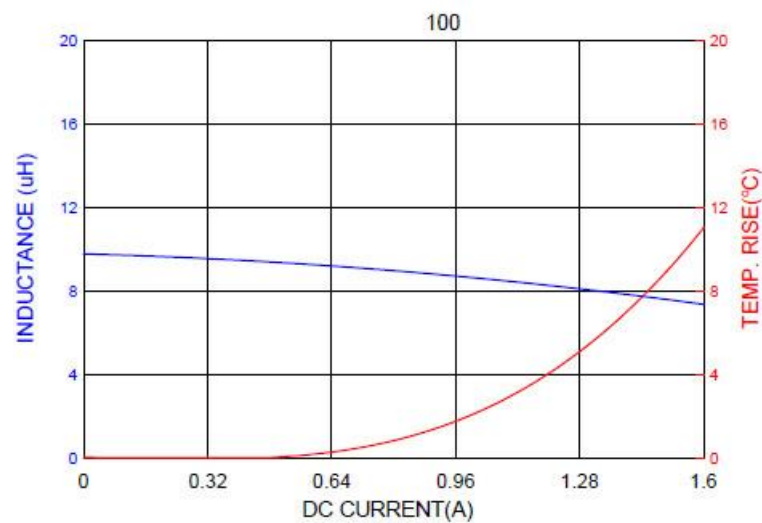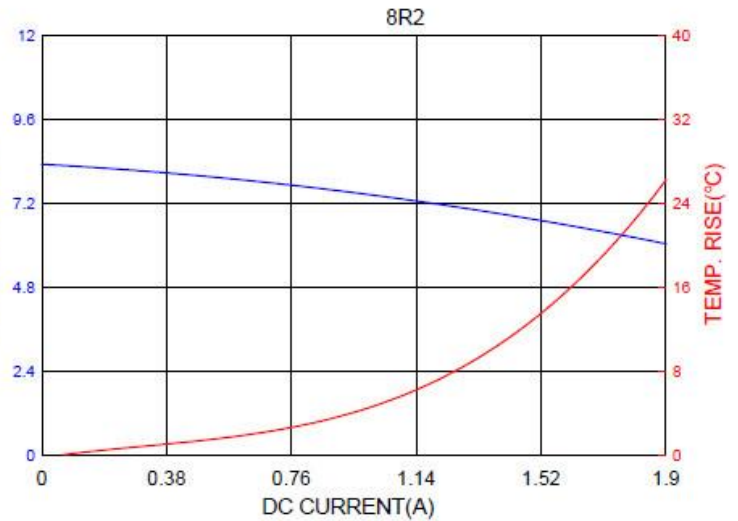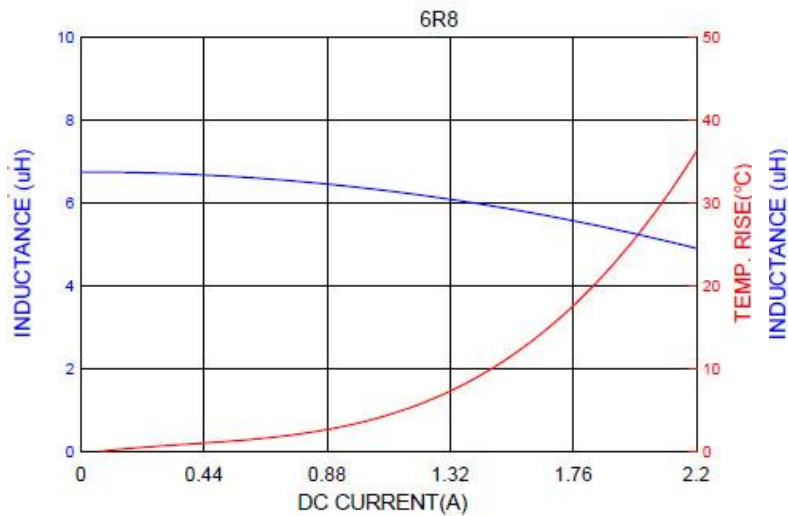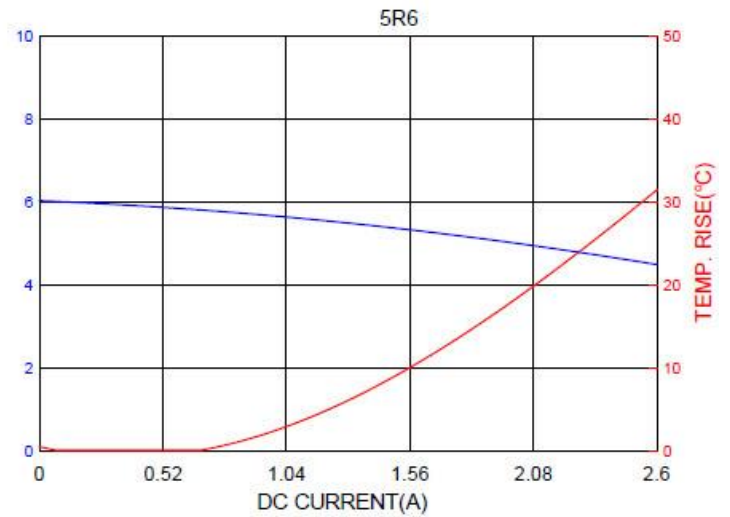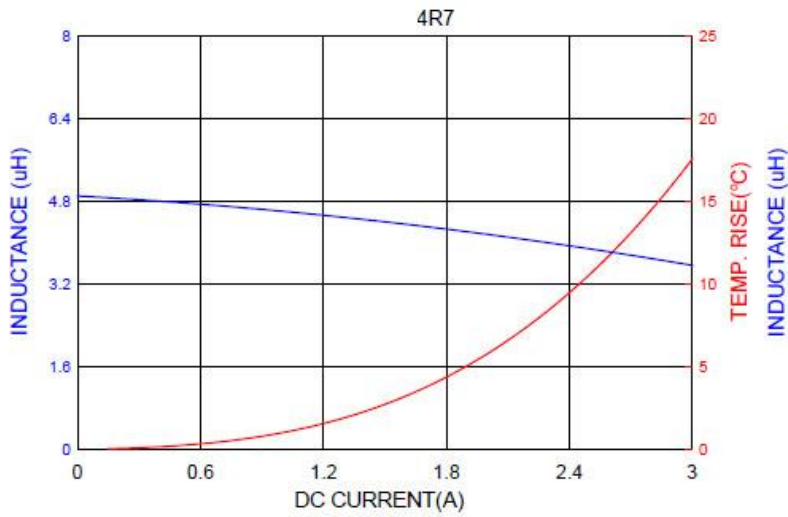

REEL DIMENSIONS (3000 pcs per reel)

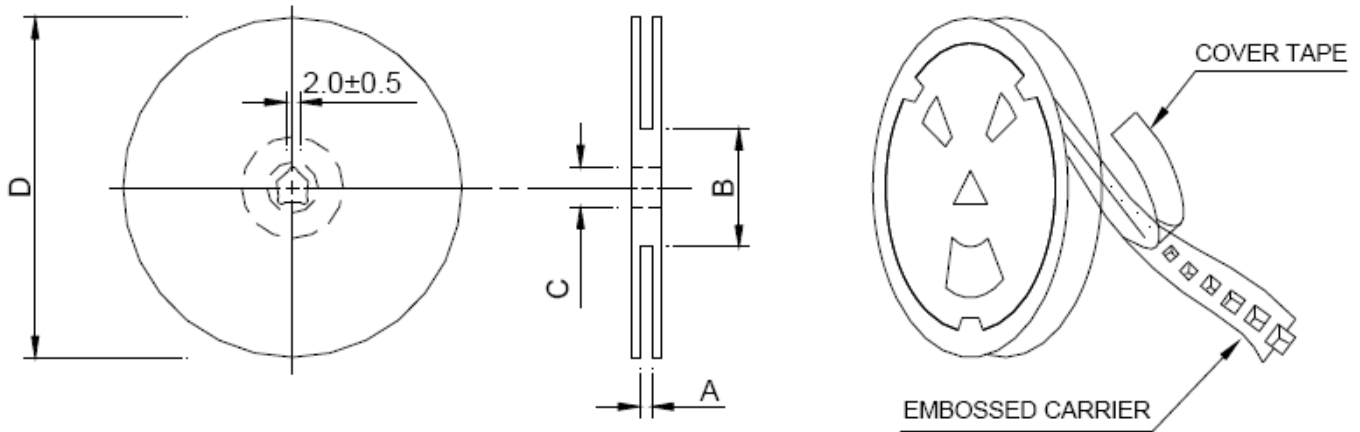


	A	B	C	D
mm	12.0 ±0.5	100 ±2.0	13.0 ±0.5	330

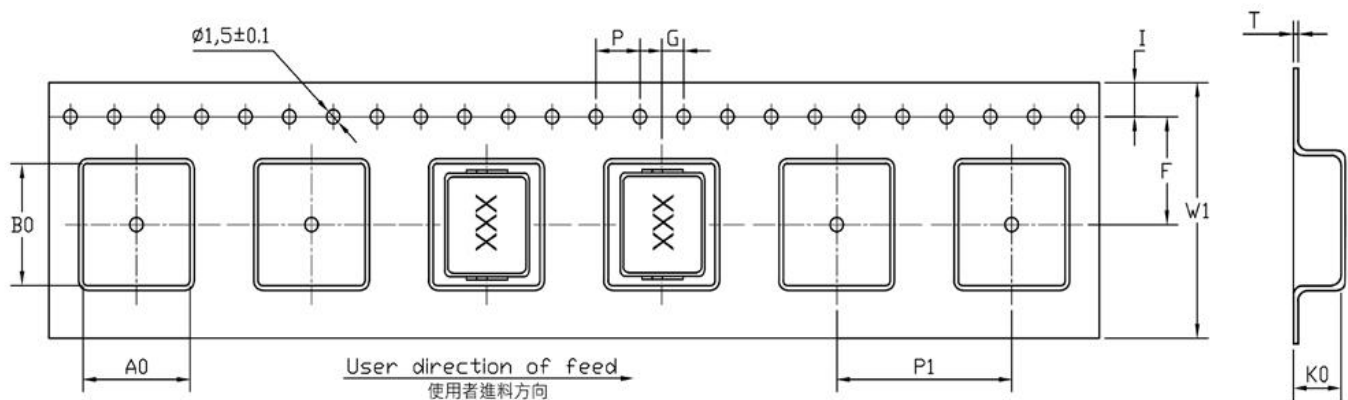


W1	12.00±0.3		G	2.00±0.1		B0	3.80±0.1
I	1.75±0.1		P1	8.00±0.1		K0	2.30±0.1
F	5.50±0.1		A0	3.50±0.1			
P	4.00±0.1		T	0.35±0.1			

RELIABILITY TEST

1. Operating temperature range
-55 TO + 125°C (Includes temperature when the coil is heated)
2. External appearance
On visual inspection, the coil has no external defects.
3. Terminal strength
After soldering. Between copper plate and terminals of coil. Push in two directions of X.Y withstanding at below conditions.
Terminal should not peel off. (refer to figure at right)
5.0N 60 sec.
4. Insulating resistance
Over 100MΩ at 100V D.C. between coil and core.
5. Dielectric strength
No dielectric breakdown at 100V D.C. for 1 minute between coil and core.
6. Temperature characteristics
Inductance coefficient $(0\sim 2,000)\times 10^{-6}/^{\circ}\text{C}$ (-25~+80°C)
inductance deviation within $\pm 5.0\%$, after 96 hours
7. Humidity characteristics (Moisture Resistance)
Inductance deviation within $\pm 5\%$, after 96 hours in 90~95% relative humidity at $40 \pm 2^{\circ}\text{C}$ and 1 hour drying under normal condition.
8. Vibration resistance
Inductance deviation within $\pm 5\%$, after vibration for 1 hour. In each of three orientations at sweep vibration (10~55~10 Hz) with 1.5mm P-P amplitudes.
9. Shock resistance
Inductance deviation within $\pm 5\%$, after being dropped once with 981m/s^2 (100G) shock attitude upon a rubber block method shock testing machine, in three different orientations.
10. Resistance to Soldering Heat: 260°C, 10 seconds (See recommend reflow)
11. Storage environment
Temperature: 0°C~35°C; -55°C~125°C after mounting on PCB
Humidity Range: 50% ~ 70% RH
12. Use components within 6 months.
If 6 months or more have elapsed, check solderability before use.

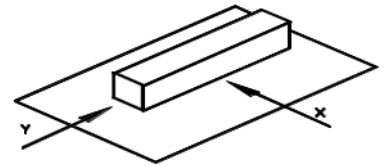

LEAD-FREE HEAT ENDURANCE TEST

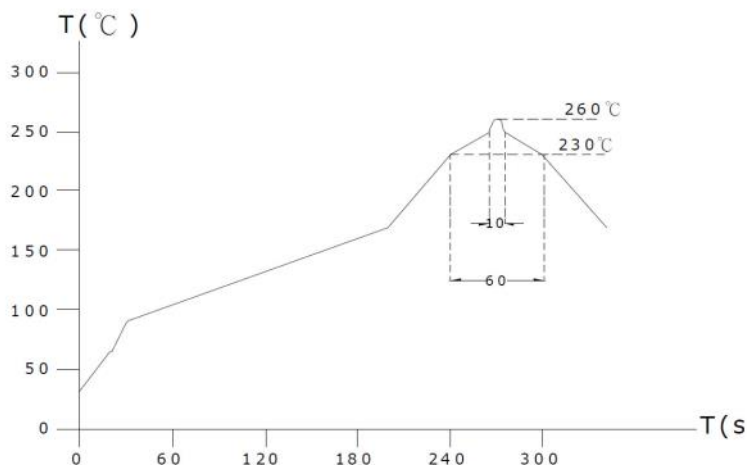

LEAD-FREE RECOMMENDED REFLOW

