

PLASTIC MOLDED SMD HCMOS VCXO (14.0 x 9.8 x 4.7mm)

FEATURES:


- HCMOS HIGH FREQUENCY RANGE
- LOW JITTER / LOW CURRENT
- SUITABLE FOR REFLOW




■ SPECIFICATION

PARAMETER	MIN.	TYP.	MAX.	UNIT	NOTE	
FREQUENCY RANGE	1		200	MHz		
FREQUENCY STABILITY	±10		±100	ppm		
OPERATING TEMPERATURE RANGE	0		70	°C	See P/N guide for other options	
STORAGE TEMPERATURE RANGE	-55		125	°C		
SUPPLY VOLTAGE ±10%	3.3		5.0	V	See P/N guide for other options	
SUPPLY CURRENT			55	mA		
OUTPUT	LOGIC FAMILY	HCMOS				
	LOAD	15pF				
	LEVEL LOGIC '1' (V _{OH})	0.9 x V _{DD}			V	
	LEVEL LOGIC '0' (V _{OL})			0.1 x V _{DD}	V	
	SYMMETRY (DUTY CYCLE)	40	50	60	%	See P/N guide for other options
	RISE AND FALL TIME (Tr/Tf)			10	nS	
START-UP TIME			10	mS		
FREQUENCY DEVIATION	±50		±150	ppm		
CONTROL VOLTAGE	0	2.5	4.5	V		
SLOPE	Positive					
LINEARITY			±10	%		
AGING @ 25°C + 3°C			±3.0	ppm	@ for 1 st year	
PHASE JITTER RMS			10	pS	@ 12kHz ~ 20MHz offset	


■ PACKAGE DIMENSIONS

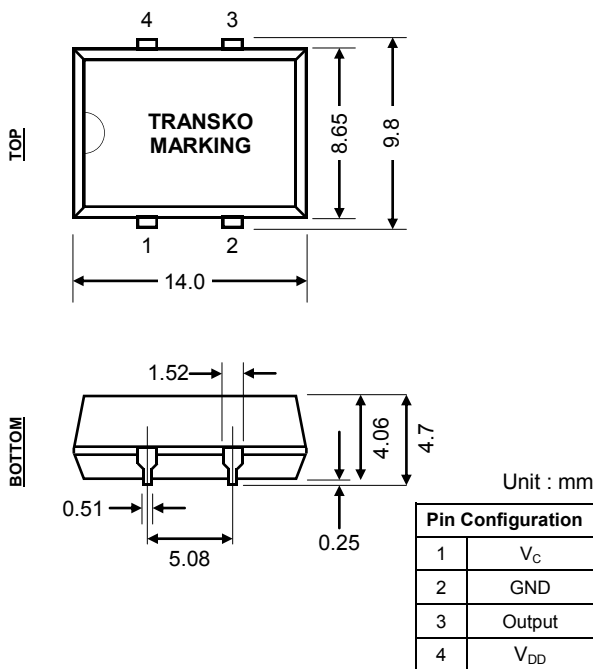


■ SOLDER PATTERN

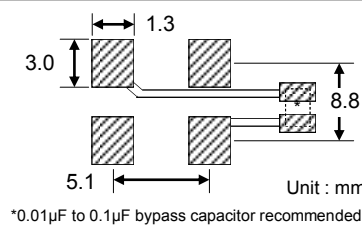

■ REFLOW PROFILE

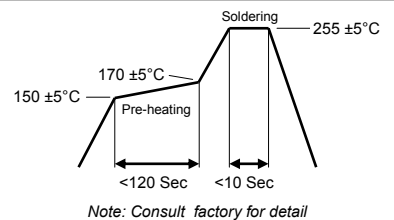

■ PART NUMBERING GUIDE

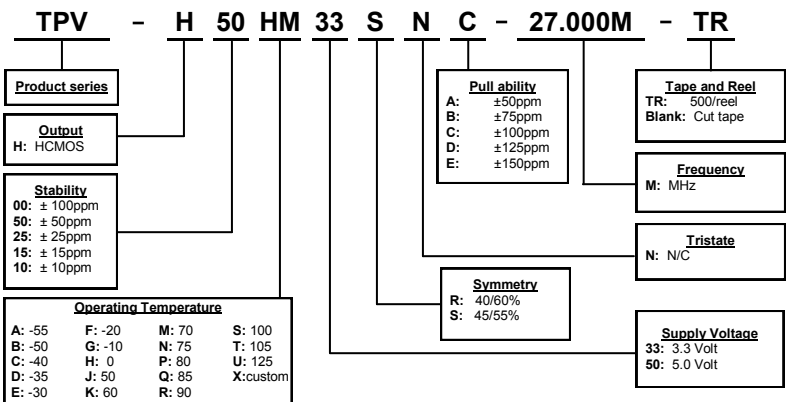

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.