

- 70.1 MHz IF SAW Filter / 19.51 MHz Bandwidth
- Revision 0: 10 Mar. 2010


## Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-	25	-
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	V			
Length x Width	mm <sup>2</sup>	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	70.05	70.1	70.20
Insertion Loss at Fo	dB	-	27.3	29.0
Temperature Coefficient	ppm/°C	-	-72	-
Amplitude Ripple within fo ±9.65 MHz	dB <sub>p-p</sub>	-	0.85	1.3
Group Delay Variation within fo ±9.65 MHz	nsec	-	40	80
Absolute Delay at Fo	µsec	-	1.68	-
Bandwidth at -1.0 dB	MHz	19.40	19.51	-
Bandwidth at -3.0 dB	MHz	-	19.98	-
Bandwidth at -40.0 dB	MHz	-	21.88	22.0
Relative Attenuation:				
Fo ±14.42 MHz	dB	-	50	
Lower Sidelobe	dB	-	45	-
Upper Sidelobe	dB	-	45	-

**Notes :** (1) With Matching Network (Ref. Testing Environment Circuit as shown below).  
Those impedances could be modified with different impedance values and/or structures, if necessary.


## Package Dimensions

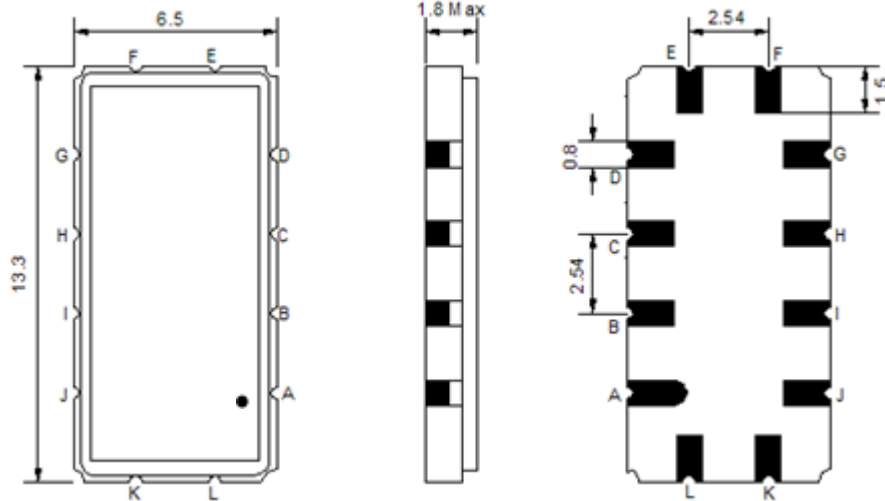

- ① **TRANSKO:** Brand
- ② **TA07019B:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

## Testing Environment

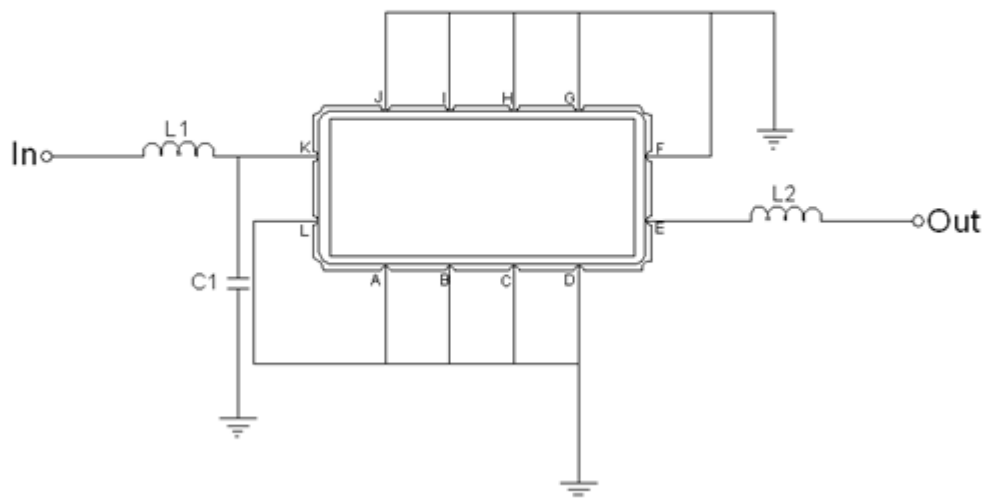



Test Fixture & Values	
Input	L1=180 nH, C1=12pF
Output	L2=150 nH
Source/Load Impedance	50 Ω

## Frequency Characteristics

### Frequency Response



**Bandwidth at -1.0 dB**

**Bandwidth at -3.0 dB**

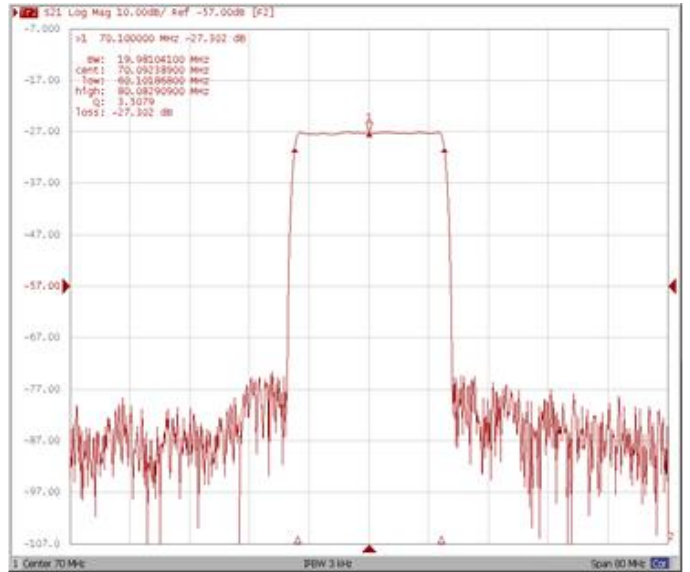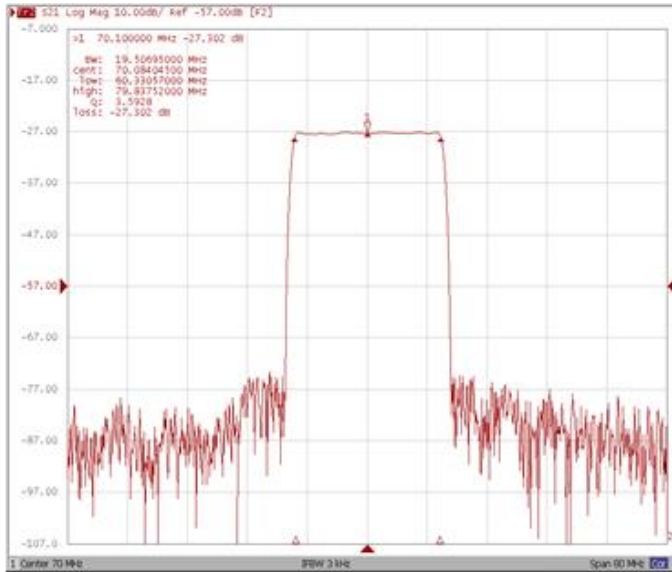


**Bandwidth at -40.0 dB**

**Attenuation Fo±14.42MHz**

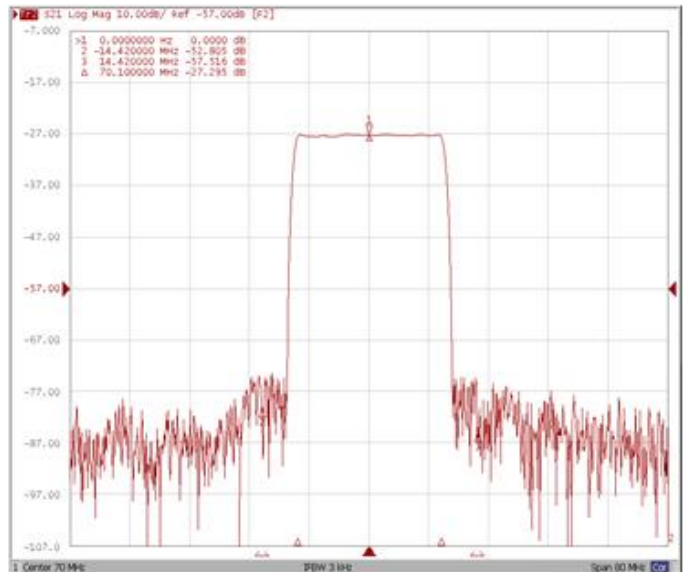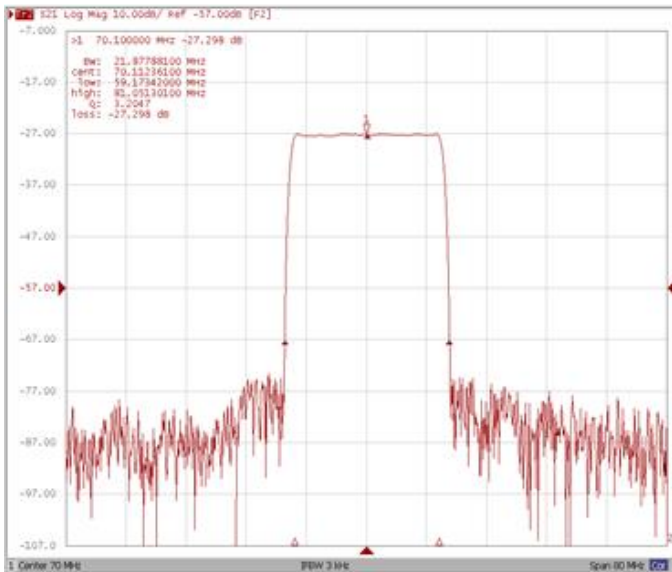


Frequency Response


Ripple Variation Fo±9.65MHz

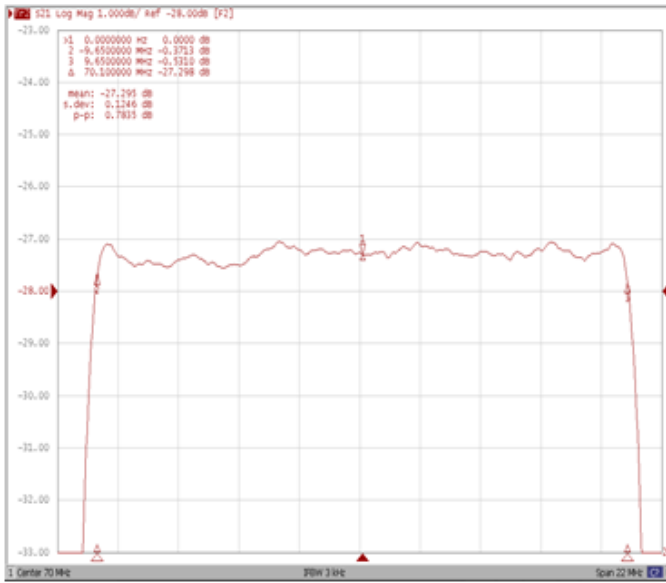

Group Delay Variation Fo±9.65MHz

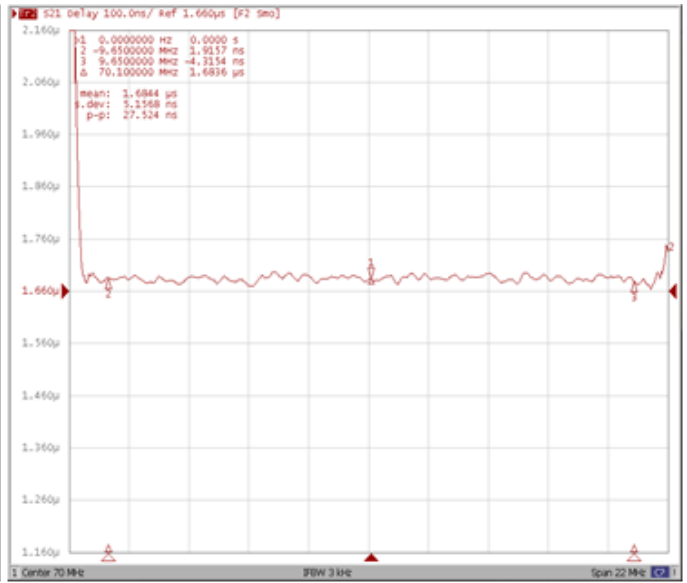

Smith Chart

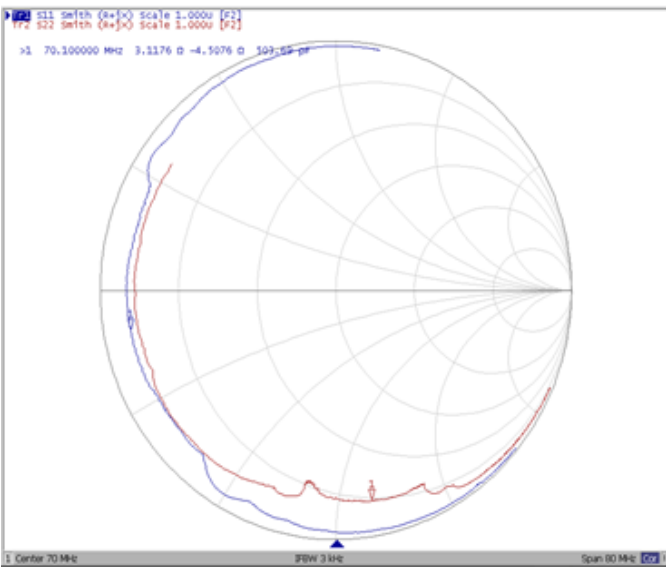

SWR

